

White Paper on 6G OSS Technologies

Jointly released by:



Authors

AsiaInfo Technologies

Institute for AI Industry Research, Tsinghua University

China Telecom Research Institute

China Mobile Research Institute

China Unicom Research Institute

China Broadcasting Network Mobile Network Co., Ltd.

Intel (China) Co., Ltd.

Cite This White Paper

White Paper on 6G OSS Technologies, Ye Ouyang, Yaqin Zhang, Xiaozhou Ye, Yunxin Liu, Xidong Wang, Jie Sun, Yang Liu, Shoufeng Wang, Sen Bian, Yun Li, et al. July 2023.

Contents

Contents	3
I. Preface	6
II. Global 6G Research Status	8
2.1 6G Vision and Requirements	8
2.2 6G Typical Scenarios	11
2.3 Overview of 6G Potential Key Technologies and Network Architectures	14
2.3.1 6G Potential Key Technologies	15
2.3.2 6G Potential Network Architecture	20
2.4 Influence of 6G Potential Key Technologies and Network Architectures on 6G OSS	24
III. Progress in Standardization of OSS-related Network Management	27
3.1 3GPP Network Management Standards	28
3.2 ITU Network Management Standards	29
3.3 TMF Network Management Standards	30
3.4 ETSI Network Management Standards	32
3.5 O-RAN Network Management Standards	33
IV. Overall Vision of 6G OSS	35
V. 6G OSS Technical Framework and Key Technologies.....	37
5.1 6G OSS Technical Route	37
5.2 12 6G OSS Potential Key Technologies	38
5.2.1 6G OSS Orchestration for Space-Air-Ground Integrated Network	38
5.2.2 6G OSS Management for 6G New Wireless Technologies	41
5.2.3 6G OSS Capability Opening	45
5.2.4 6G OSS Support for 6G Full-stack SBA	49
5.2.5 6G OSS Data Governance	51
5.2.6 6G OSS Hyperautomation	53
5.2.7 6G OSS Application in ESG	55
5.2.8 6G OSS Distributed Autonomous Cooperation based on Space-Air-Ground Integration and Joint Communications and Sensing	58
5.2.9 6G OSS DTN	60
5.2.10 6G OSS Native Network Security	61

5.2.11 6G OSS Management for Computing Native Network	62
5.2.12 6G OSS Native Intelligence.....	64
5.3 Summary of 6G OSS Technology Framework	67
VI. 6G OSS Architecture and Functions	68
6.1 6G OSS Functional Architecture	68
6.2 6G OSS Function Description	69
6.2.1 6G OSS Core Functions.....	69
6.2.2 Intent-driven Function	72
6.2.3 Automation Capability.....	74
6.2.4 Intelligence Capability	76
6.2.5 Digital Twin Capability	78
6.2.6 Data Management Function.....	81
6.2.7 Security and Trust Management Function.....	83
6.3 Typical Cases of 6G OSS	85
VII. Realization of 6G OSS	90
7.1 5G OSS	90
7.2 Evolution Route Towards 6G OSS	92
7.3 Direction of 6G OSS Standards Evolution	94
VIII. Summary and Prospect.....	99
Bibliography	101

List of Figures

Figure 2-1 Key Performance Requirements for 6G Networks.....	11
Figure 2-2 Vision for Distributed Autonomous 6G Network Architecture	21
Figure 2-3 Architecture of 6G Network with Native Intelligence.....	21
Figure 2-4 EU 5G PPP 6G Network Architecture.....	22
Figure 2-5 EU Hexa-X Intelligent 6G Network Architecture	22
Figure 2-6 Next G Network Architecture Based on Service and Distributed Non Access Stratum (NAS).....	23
Figure 5-1 6G OSS Technical Route.....	37
Figure 5-2 Three-dimensional and Flexible Network Orchestration of 6G OSS	39
Figure 5-3 API System of 6G OSS	47
Figure 5-4 6G OSS Data Governance Process.....	51
Figure 5-5 6G OSS Technical Framework	67
Figure 6-1 6G OSS Functional Architecture.....	68
Figure 6-2 Automation Capability	74
Figure 6-3 Intelligence Capability	77
Figure 6-4 Digital Twin Capability	78
Figure 6-5 6G OSS Data Management	81
Figure 6-6 Joint Optimization of Communication, Sensing and Computing Performances	85
Figure 6-7 Service Provisioning Process of 6G Space-Air-Ground Integrated Network.....	88
Figure 7-1 Evolution of 6G OSS implementation.....	93
Figure 7-2 Evolution from Existing Network Management Architecture to 6G OSS.....	98

I. Preface

With the continuous evolution of mobile communication technology from 1G to 5G, mobile communication has penetrated into every aspect of production and life. In the 5G era, mobile communication system has transformed its role from providing communication services to empowering the digital and intelligent transformation in all kinds of industries. The 6th generation mobile communication system (6G), as a new generation of intelligent and integrated digital information infrastructure, will bring about breakthrough capabilities such as the integration of communication, sensing and computing, and the coverage of space, air, ground and sea. Characterized by ubiquitous interconnection, inclusive intelligence, multi-dimensional perception, global coverage, green and low-carbon, native network security, etc., 6G will realize the transition from serving people and people-things communication to supporting the efficient connection of intelligent agents, and comprehensively leading the digital, intelligent and green transformation of the economy and the society.

It is commonly expected in the industry that 6G will be commercially available in 2030^[1]. As major countries are working on 6G, the global 6G technology competition has kicked off. By the end of 2022, major international standardization organizations, industry organizations and research institutions have published more than 30 6G pre-research white papers. Major standardization organizations such as the International Telecommunication Union (ITU) and the Third Generation Partnership Project (3GPP) are expected to start 6G standardization in 2023. Currently, researches on 6G mainly focus on vision, requirements, typical service scenarios, potential key technologies and network architecture. There is a lack of forward-looking and systematic research on 6G Operation Support System (OSS), which is essential for the network.

OSS provides core support for mobile communication network. The main functions of 5G OSS include configuration management, service orchestration, performance management, fault management, and security management. Based on these functions,

data platforms and artificial intelligence (AI) are introduced to achieve big data and network intelligentization for 5G networks [2]. In terms of 6G, to achieve space-air-ground integrated networking, and joint communication, sensing and computing, 6G OSS should provide integrated operation and maintenance (O&M) management of various physical networks, such as ground cellular networks, satellite networks and high-altitude platform stations, and communication, sensing and computing resources, to support the technical evolution of the 6G basic networks. Given the current intelligence capability of 5G OSS, it is difficult to meet the requirements of a larger, more complex network system and the full life cycle management of planning, construction, optimization, maintenance and operation in 6G scenarios. 6G OSS must realize the full autonomous O&M of the networks from end to end by fully realizing high-level automation, intelligence and digital twinning capability, thus supporting the operation of typical 6G business scenarios. 6G OSS also needs to play a greater role in ESG (Environmental, Social, and Corporate Governance), and leverage the advantages of 6G in space-air-ground integrated networking, and joint communication, sensing and computing, so that 6G will become a green, efficient and secure global digital infrastructure.

Based on 5G OSS research and construction efforts by AsialInfo and industry-academia-research partners, this White Paper, through the analysis of 6G research status and OSS standardization research status, presents the overall vision for OSS in 6G era, explores the potential key technologies and functional architecture of 6G OSS, and provides suggestions for the evolution from 5G OSS to 6G OSS. This White Paper is expected to provide useful ideas for the development the next generation mobile communication.

II. Global 6G Research Status

2.1 6G Vision and Requirements

As the global digital transformation continues to deepen, the network is profoundly influencing our production and life. By 2030, the requirements for balanced social services, scientific social governance, green social development, high-quality economic development and environmental sustainability will drive the transformation of mobile communication networks from communication infrastructure to digital infrastructure and promote the development from 5G Internet of Everything to 6G Intelligence of Everything.

China's IMT-2030 (6G) Promotion Group has proposed the overall 6G vision of "intelligence of everything and digital twin" ^[1]: 6G will be integrated with advanced computing, big data, AI, blockchain and other information technologies to become a fundamental element that brings convenience to life, empowers production and promotes green development. All of the low-, medium- and high-spectrum resources will be leveraged to achieve seamless global space-air-ground coverage. Fully immersive interaction scenarios will be provided to support precise spatial interaction, and satisfy human interaction at the level of senses and even emotions and consciousness. Communication sensing and proliferation of intelligence will enhance traditional communication capabilities, and help to realize the digitization and intelligentization of physical entities in real environments. A new network featuring intelligent interconnection of human-machine-things and efficient intercommunication of intelligent agents will be built, with new functions such as native intelligence, multi-dimensional sensing, digital twinning, and native network security. Efficient and intelligent interconnection of people-people, people-things, and things-things in the physical world will be realized to create a digital world that is ubiquitous and fine, real-time and trustworthy, and organically integrated.

The North American Next G Alliance report “Roadmap to 6G” identifies six audacious goals for the 6G vision [3]: an emphasis on trust, security, and resilience under all conditions; enhancing Digital World Experiences to improve quality of life and create greater economic value; Cost Efficiency solutions; Distributed Cloud and Communications Systems built on virtualization technologies to increase flexibility, performance, and resiliency; AI-Native Future Network to enhance robustness, performance, and efficiencies of applications; and sustainability related to energy efficiency and the environment towards the goal of IMT carbon neutral by 2040.

China Mobile, US Cellular and European Vodafone have pointed out in the Mobile Operators’ Next Generation Mobile Network (NGMN) Alliance’s White Paper “6G Drivers and Vision” [4] to: introduce new human machine interfaces that extend the user experience across multiple physical and virtual platforms for a variety of use cases; use terrestrial and non-terrestrial networks to provide coverage across land, sea and sky; ensure cost and energy-efficient delivery of heterogeneous services for extremely diverse requirements under the stringent constraints of energy consumption and carbon emission limits, towards achieving the goals of sustainability and carbon neutrality; and identify appropriate AI-based frameworks, with the objective of supporting value creation and delivery, resource allocation optimization, and sustainable deployment and operation, among others. The major communication device manufacturers have also released their views on the 6G network vision and requirements. Ericsson proposes in a White Paper that the development of 6G is driven by the need for trusted networks, sustainable development, AI-enabled easy living, and the need for exploration of new and unknown applications, where the most typical application scenario is information interaction between the digital and physical worlds [5]. In its *6G: The Next Horizon White Paper* [6], Huawei holds that 6G will leap over connected people and things to connected intelligence, driving comprehensive digital transformation across vertical industries; Samsung’s 6G vision is to provide a higher-order connected experience for humans and machines, including immersive XR services, as well as high-fidelity and digital twin services [7]; and Nokia believes that 6G will extend and transform existing network

capabilities and converge the human, physical, and digital worlds to unleash our innate human potential. [8]

The global academic community is also actively involved in the research and exploration of the 6G vision and requirements. In 2019, University of OULU first identified ubiquitous wireless intelligence as a key vision for 6G in its publication “Key drivers and research challenges for 6G ubiquitous wireless Intelligence” [9]. In 2020, University of SURREY proposed to take supporting the integration of physical and virtual worlds and achieving ubiquitous coverage as a new strategic vision for 6G [10]. In the same year, Southeast University, together with ShanghaiTech University, University of Southampton and other research institutions in China and other countries, jointly published “6G Research White Paper” [11], proposing the development vision for 6G wireless communication network of “full coverage, full spectrum, full application and strong security”: space-air-ground-sea integrated network to provide deep global coverage; utilization of full spectrum resources including sub-6 GHz band, millimeter wave, Terahertz, and optical band to provide higher data transmission rate. efficient integration of AI with 6G wireless communication network to achieve better network management and automation and improve the performance of next-generation networks; strong or native network security including security at physical and network layers.

In summary, a preliminary consensus on 6G vision has been reached globally. 6G will go beyond connectivity to achieve the deep integration of cyberspace with human society, the physical world with the digital world through its feature of full spectrum, full coverage, security and reliability, energy conservation and proliferation of intelligence.

6G typical deployment scenarios will feature high traffic, high density, high mobility, high precision, high intelligence, and wide coverage, respectively. The key performance requirements for 6G in a typical deployment scenario will mainly cover experience rate, peak rate, traffic density, air interface latency, synchronization and jitter, connection number density, mobility, reliability, coverage, sensing/location accuracy, AI service accuracy, etc., to meet the key performance requirements such as Gbps experience rate,

10 million connections per second, sub-millisecond latency, 99.99999% reliability, centimeter-level sensing accuracy, and intelligence accuracy beyond 90% [12].

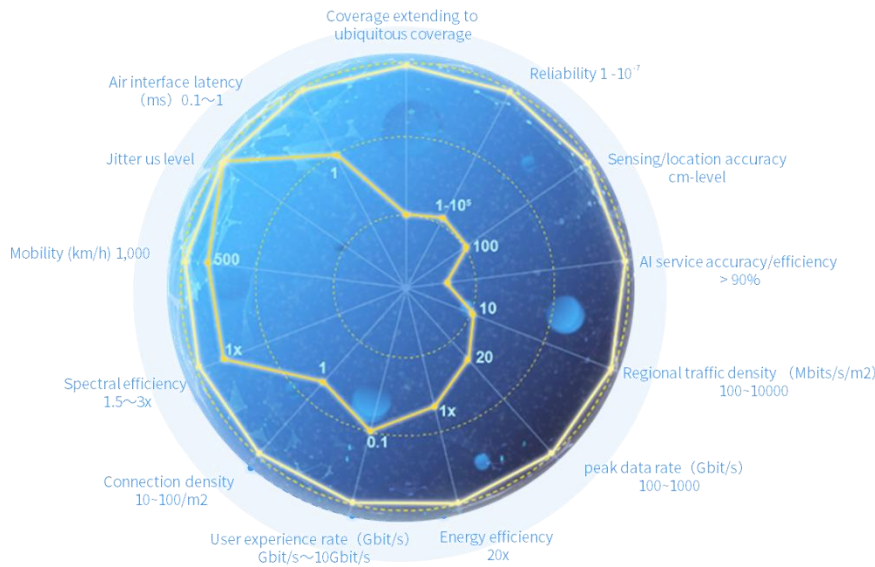


Figure 2-1 Key Performance Requirements for 6G Networks

2.2 6G Typical Scenarios

The discussion of global communication standardization and industry organizations for typical scenarios of 6G has gradually made it clear that 6G will further expand new scenarios that address new demands and technologies based on continuously enhancing the three typical scenarios of 5G, including: enhanced Mobile Broadband (eMBB), Ultra Reliable Low Latency Communication (uRLLC) and Massive Machine Type Communication (mMTC). New features such as inclusive intelligence services and joint communications and sensing will also be incorporated into the scenarios of 6G [13,14].

Ultra wireless broadband, will be the evolution and expansion of enhanced Mobile Broadband (eMBB), which will encompass more diverse human-computer interaction to provide seamless coverage anywhere in the world in addition to significantly enhanced human-centric immersive communication experience. Typical applications include immersive XR and holographic communication, remote multisensory presentation and interconnection, and industrial robot haptic feedback and control. In addition, independent support from voice services is an integral part of immersive

communication. The scenario will feature extremely high data rates, lower latency and greater system capacity. It covers all types of deployment scenarios from dense urban hotspots to rural areas. These scenarios will be more demanding for peak rates, user experience rates, system capacity, and spectral efficiency. Due to the extremely high sampling density of environmental data, reliable computing on the network will be used to load computationally complex processing and rendering, or to remotely access rendered images in real time. In addition, 6G networks need to provide low latency and high stability to guarantee user experience.

Extremely reliable communication will provide enhanced capabilities based on Ultra Reliable Low Latency Communication (URLLC), including communications with stringent requirements for transmission reliability and availability, such as extreme URLLC (time sensitivity, trust, etc.) beyond IMT-2020. The scenario is also used for services beyond connectivity, such as reliable computing, precise location or characterization of connected or unconnected objects, data distribution, AI-native RAN design, and other network platform functions, with requirements for other properties such as data rate, latency, jitter sensitivity, power limitations, and device connection density varying depending on the use case under consideration. For some applications, it is critical to be capable of providing predictable performance differences. Typical applications include those in the fields of robot collaboration, swarms of drones and various human-machine real-time interactive operations, autonomous driving, remote medical operation, smart energy and smart home. Such applications generally require lower latency and higher reliability. Applications for machine cooperative interaction also require more stringent deterministic metrics such as jitter, time synchronization, and stability. This requires the networks to be able to provide both medium- and high-speed data transmission and ultra-high-accuracy locating capabilities.

Ultra-large-scale connection will enhance Massive Machine Type Communication (mMTC) in 5G, expand new application fields and capability boundaries, with a focus on IoT and mobile broadband connection capacity. A large number of sensor deployments not only require a large number of connections, but also a wide coverage

in various geographical distribution. In addition, extended battery life, enhanced network coverage and low cost are key factors to be taken into account. The objects connected in ultra-large scale will include various types of devices and a large number of sensors for smart cities, smart transport, smart agriculture, and smart manufacturing, etc. They interact with the physical world through modeling, deduction and decision making based on digital twin technologies, and may need the capabilities to support high-accuracy locating, high reliability and low latency. Compared with 5G, which only supports low-rate transmission of large-scale devices, 6G ultra-large-scale connected devices will support transmission rates ranging from low to high, with significantly differentiated business requirements, requiring the network to provide diverse and flexible performance support.

Inclusive intelligence services are a new typical scenario added to 6G. Intelligence services are new transcendent communication services provided by future IMT networks to support AI-driven applications and in-device AI functions. It features the integration of AI-native functions into future IMT networks and applications to provide joint communication and AI arithmetic for intelligent services that require efficient distributed intelligent learning or inference by relying on the network, improve the overall performance and efficiency of the network, enable complex AI training and inference tasks to be performed together with a large number of intelligent agents in the network, and enable native AI in the network by building AI/ML tools into each layer of the network. AI also requires reliable computing, distributed learning and inference capabilities, versatility, and availability. In addition, achieving native and trusted network security and data privacy protection is also an important goal and basic condition for this scenario.

Joint communication and sensing is a new typical scenario added to 6G. The integration of sensing and communication will provide diversified capabilities such as high-accuracy locating, environment reconstruction, imaging and so on, which will greatly promote the demand for ultra-high resolution and accuracy applications, such as ultra-high-accuracy locating, high-resolution real-time wireless map construction, device-

based or even device-free passive target locating, environment reconstruction and monitoring, and gesture and action recognition. This scenario adds new requirements in performance dimension, such as sensing resolution, sensing accuracy, and detection probability for distance, speed, and angle, and the index requirements vary from application to application.

2.3 Overview of 6G Potential Key Technologies and Network Architectures

In order to achieve the vision of intelligent connection of “people, physical world and digital world” and meet the extreme performance requirements for 6G, research institutions have proposed 23 potential key technologies for 6G networks ^[1, 3]. In this White Paper, the potential key technologies are divided into four categories according to the type of technology.

- **6G wireless technology:** Terahertz communications technology, visible light communications technology, dynamic spectrum sharing technology, ultra-massive MIMO technology, delay Doppler domain OTFS waveform technology, advanced modulation and coding technology, full duplex technology, non-orthogonal multiple access technology, semantic communication technology, reconfigurable intelligent surface (RIS) technology, intelligent holographic radio (IHR) technology, and orbital angular momentum (OAM) technology.
- **6G network technology:** Space-air-ground integrated networking technology, deterministic network technology, distributed autonomous network technology, programmable network technology, service-based RAN technology.
- **6G convergence technology:** Joint communications and sensing technology, network native AI technology, digital twin network (DTN) technology, and computing network technology.
- **6G security technology:** Native network security technology, blockchain RAN technology.

2.3.1 6G Potential Key Technologies

6G Wireless Technologies

6G wireless technologies include Terahertz communications technology, visible light communications technology, delay-Doppler domain OTFS waveform technology, ultra-massive MIMO technology, reconfigurable intelligent surface technology, intelligent holographic radio technology, etc.

Terahertz communications technology can be a useful supplement to existing air interface transmission modes, and mainly applied in potential application scenarios such as holographic communication, ultra-large capacity data backhauling, and short-range ultra-high-speed transmission. Meanwhile, high-accuracy locating and high-resolution sensing with the help of Terahertz communications signals are also important application directions ^[1].

Visible light transmission refers to the high-speed communication mode using 400 THz to 800 THz ultra-wide spectrum, featuring no authorization, high confidentiality, green and no electromagnetic radiation. Visible light communications technology is more suitable for indoor application scenarios, and can be an effective supplement to indoor network coverage ^[1].

Delay-Doppler Domain OTFS Waveform technology migrates the digital domain processing and analysis of signals from the time-frequency domain to the delay Doppler domain, exploits the sparsity of the delay Doppler channel for signal processing and analysis, and obtains the time-frequency domain diversity gain of the transmitted signal against Doppler-induced inter-carrier interference through the conversion from the delay Doppler domain to the time-frequency domain, which is expected to improve the transmission rate in 6G high mobility scenarios ^[7].

Ultra-massive MIMO technology is a further evolution of MIMO technology. With the continuous scale-up of antenna array driven by higher degree of antenna and chip integration, ultra-massive MIMO technology can achieve higher spectral efficiency, wider and more flexible network coverage, higher location accuracy and higher energy

efficiency in a more diverse frequency ranges. Moreover, distributed ultra-massive MIMO helps to build ultra-large scale antenna array, so that the network architecture approaches the cell-free amorphous network, which in turn helps to achieve uniform and consistent user experience, obtain higher spectral efficiency and reduce the transmission energy consumption of the system^[15].

Reconfigurable intelligent surface (RIS) technology achieves signal propagation direction modulation, signal enhancement or interference suppression in three-dimensional space using programmable new subwavelength two-dimensional metamaterials through software-based active control of the radio propagation environment, which can be applied to scenarios such as high-frequency coverage enhancement, local void overcoming, enhancement of rates for users at the cell edge, green communication, electromagnetic environment sensing assistance and high-accuracy locating^[7].

Intelligent holographic radio (IHR) achieves dynamic reconstruction and real-time precise regulation of electromagnetic space using the holographic interference principle of electromagnetic waves. It will also realize the mapping from radio frequency holography to optical holography with ultra-high resolution spatial multiplexing capability. The main application scenarios include ultra-high capacity and ultra-low latency radio access, as well as high-accuracy locating, precise wireless power supply and data transmission of massive IoT devices^[14].

In addition to the five technologies mentioned above, semantic communication technology, dynamic spectrum sharing technology, advanced modulation and coding technology, full duplex technology, non-orthogonal multiple access technology, and orbital angular momentum technology are also potential key wireless technologies for 6G. Furthermore, wireless network cloudification is also one of the crucial evolution directions for 6G, which can satisfy the diverse requirements of 6G wireless network, including deep integration of communication, perception, computation, and artificial intelligence. Wireless network cloudification serves as a fundamental technological underpinning to build open, flexible, and high-performance 6G wireless network.

6G network technologies

The potential key network technologies for 6G mainly include space-air-ground integrated networking technology, service-based radio network technology, distributed autonomous network technology, etc.

Space-air-ground integrated networking technology integrates terrestrial network, satellites (high, medium and low earth orbit satellites) at different orbital altitudes and aircrafts at different airspaces to become an integrated satellite-terrestrial mobile information network, which achieves permanent coverage of urban hotspots through terrestrial network and on-demand coverage of remote areas, sea and air using space-based and air-based networks, with outstanding advantages such as flexible networking and resilience against destruction ^[15].

Service-based wireless network technology decouples traditional integrated single base stations into control plane and user plane services, realizes interaction and capability opening between functional services through service-based interfaces, provides more flexible or streamlined network service capabilities in an on-demand combination, and helps improve the network adaptability to the entire industry^[16].

Distributed autonomous network technology includes the 6G network architecture including the access network and core network. For the access network, a simple architecture aiming to reduce processing latency and a flexible architecture with on-demand capabilities should be designed, demand-driven intelligent control mechanisms and radio resource management researched, and software-based and service-oriented design concepts introduced; for the core network, a distributed, decentralized, and autonomous network mechanism is needed for flexible and universal networking. Distributed autonomous network architecture involves various key technologies covering, for example, decentralized and user-centric control and management, demand-driven lightweight access network architecture, intelligent control mechanisms and radio resource management design ^[14].

In addition, deterministic network technology and programmable network technology are also potential key network technologies for 6G.

6G Convergence Technology

Currently, there are four potential 6G convergence technologies, namely joint communications and sensing technology, network native AI technology, DTN technology, and computing-aware network technology.

Joint communications and sensing technology is designed to enable two separate but mutually beneficial functions, radio communication and radio sensing, in the same system. On the one hand, communication systems can use the same spectrum or even multiplex hardware or signal processing modules to complete different types of sensing services. On the other hand, the sensing results can be used to aid communication access or management, thus improving service quality and communication efficiency. Joint communications and sensing technology obtains basic characteristics (such as form, material, distance and mobility) of environmental objects through collecting and analyzing scattered and reflected communication signals, and achieves different functions such as locating and imaging by virtue of classical algorithms or AI algorithms [14, 17].

Network native AI technology renders AI models native to mobile communication system and presents a new intelligent network technology system through wireless architecture, wireless data, wireless algorithms and wireless applications. 6G network native AI can be divided into new air interfaces with native intelligence and new network architectures with native intelligence. The new air interfaces with native intelligence will break the modular design framework of existing air interfaces to achieve deep mining and utilization of multi-dimensional characteristics of radio environment, resources, interference, businesses and users and achieve autonomous operation and self-evolution of the network. The new network architectures with native intelligence, using the communication, computing and sensing capabilities of network nodes and through distributed learning, group intelligence collaboration and cloud-edge-terminal

integration algorithm deployment, enables 6G network to natively support various AI applications and builds a new ecology and user-centric business experience [18, 19, 20].

Digital twin network (DTN) is a network system that has a physical network entity and a virtual twin capable of real-time interactive mapping [21]. In this system, various network management and applications can make use of the virtual twin of the network built by virtue of digital twin technology to efficiently analyze, diagnose, simulate and control the physical network based on data and models. At the same time, DTN service, as a new network service, is a twin service that provides end-to-end or partial network functions for the industry, which accelerates mobile network innovation, reduces the R&D cost and shortens the R&D cycle of telecom industry. The DTN platform can help achieve more secure, intelligent, efficient, and visualized intelligent 6G networks by interacting data in real time between the physical and digital networks which influence each other [22].

Computing-aware network technology connects and cooperates with the diverse cloud-edge-terminal computing resources through networking, realizing the deep integration and cooperative sensing of computing and the network, and achieving on-demand scheduling and efficient sharing of computing power services. The management and control system of the computing-aware network will extend from the network to the terminal side. Through the business perception of application layer via network layer, a new terminal-edge-cloud integrated network architecture will be built to realize the indiscriminate delivery and automatic matching of computing resources, and intelligent network scheduling, and to solve the problems of multi-party collaboration relationship and operation mode in the computing-aware network.

6G Security Technologies

The architecture of 6G native network security technology should be based on a more inclusive trust model that is resilient and covers the full life cycle of the 6G network, and natively carries a more robust, intelligent and scalable security mechanism. It involves multiple security technology directions: 6G security architecture and key technologies that integrate computer networks, mobile communication networks and

satellite communication networks, and support native network security and security dynamic empowerment; key technologies for security collaboration among terminals, edge computing, cloud computing and 6G network that support multi-mode trust architecture with coexistence of heterogeneous converged networks of centralized, decentralized and third-party trust modes; cryptographic application technologies and key management systems that fit the characteristics of 6G wireless communication, such as quantum security cryptography, approximating Shannon one-time pad and key security distribution technology, etc.; theories and key technologies for monitoring and privacy computing of large-scale data flow, high-throughput and high-concurrency data encryption and decryption and signature verification, which are easy to scale, easy to manage, with blockchain basic capabilities for guaranteeing security and privacy; access control model and mechanism for topology high dynamic and wide area information sharing, and isolation and exchange key technologies ^[17].

Blockchain radio access network (B-RAN) is a decentralized and trusted radio access paradigm supported by blockchain technology. Blockchain radio access network can create trusted physical links between service providers and customers while supporting spectrum sharing, cooperative transmission, multi-hop data transmission, and device-to-device communication. Thanks to its distributed property, blockchain radio access network can inherently support the cutting-edge federated learning, to deliver intelligent services to the entire network through the integration and coordination of communication, computing, caching and control units by leveraging network effects and attracting more participants ^[23].

2.3.2 6G Potential Network Architecture

With the deepening of research and exploration on key technologies for 6G, global 6G promotion organizations have put forward proposals for the evolution of 6G network architecture.

China's IMT-2030 proposes a distributed autonomous 6G network architecture ^[24], as shown in the figure below. The distributed and customized 6G network architecture can

not only resist DDoS attacks and reduce the risk of single point of failure, but provide customized policies for each user. The decentralized user and data management mode also enables end-users to own and control their personal digital assets, provides DaaS and, provides AIaaS based on network AI with native intelligence. At the same time, IMT-2030 proposes an architecture framework for 6G network with native intelligence, including heterogeneous resource layer, function and orchestration management layer and capability opening layer in sequence from bottom up, aiming to build an intelligent network with intelligent interconnection of human-machine-things and efficient communication between intelligent agents, and finally realize the overall 6G vision of “intelligence of everything and digital twin”.

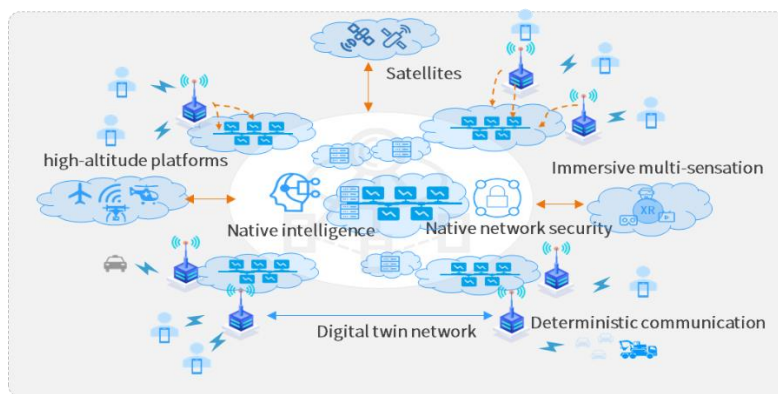


Figure 2-2 Vision for Distributed Autonomous 6G Network Architecture

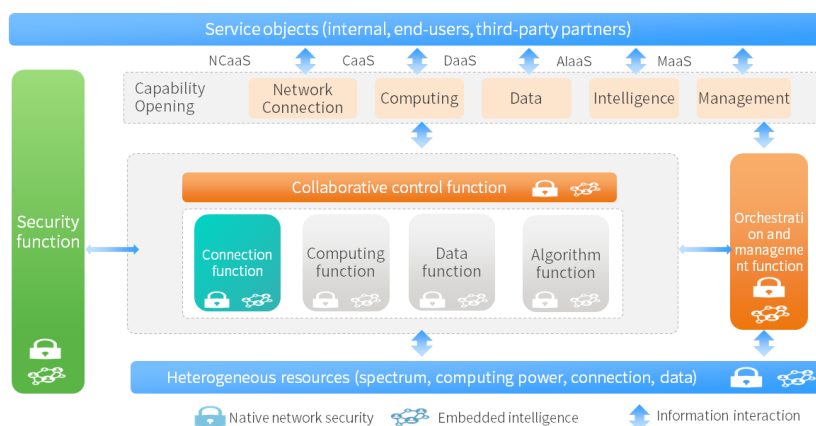


Figure 2-3 Architecture of 6G Network with Native Intelligence

The EU 5G PPP Architecture Working Group proposes an end-to-end 6G network architecture that includes infrastructure, network services and applications, as shown in the figure below, mainly following the principles of capability opening, AI-based automation, flexible topology, scalability, resilience and availability, service-oriented opening interfaces, and decoupling and simplification of network functions. At the same time, the EU has launched the Hexa-X 6G wireless network plan and proposed an intelligent 6G network architecture, highlighting the application of AI, machine learning and programmable technologies for 6G networks [25, 26].

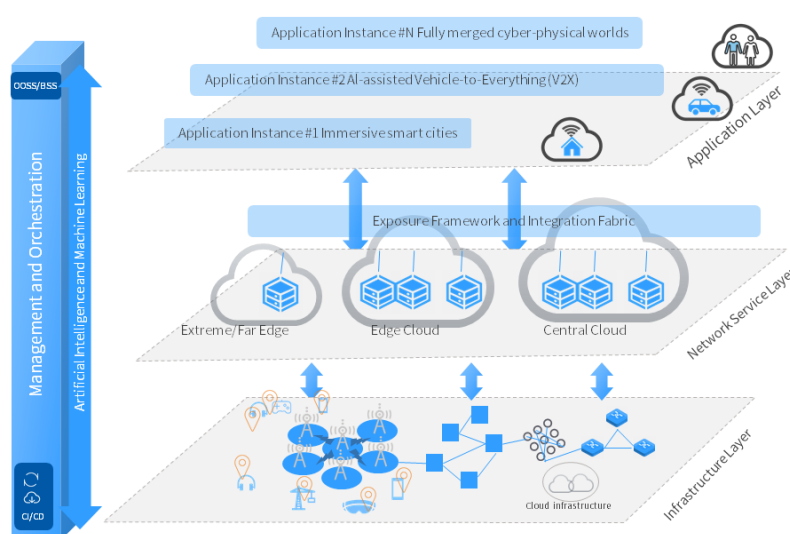


Figure 2-4 EU 5G PPP 6G Network Architecture

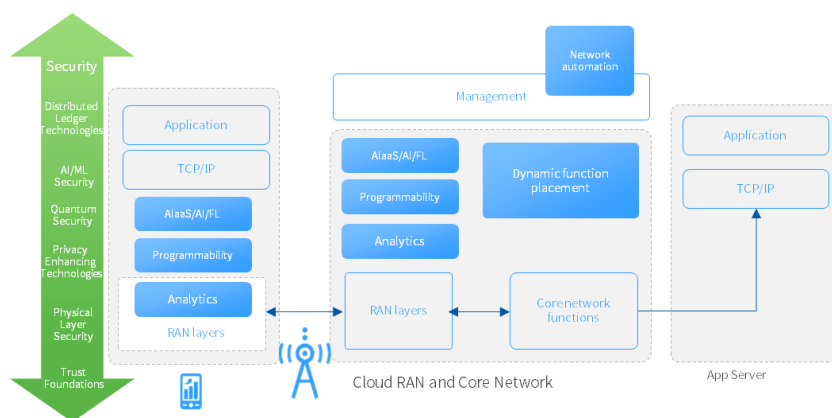


Figure 2-5 EU Hexa-X Intelligent 6G Network Architecture

The Alliance for Telecommunications Industry Solutions (ATIS) launched the North American Next G Alliance to promote North American leadership in 6G and future mobile technologies, and proposed key technologies for 6G network architecture,

including non-terrestrial networks (NTN), mesh and sidechain RAN topology structures, network architecture based on service and distributed non access stratum (NAS), network decoupling, distributed cloud platform, and application of AI/machine learning in network and devices, to accelerate the research and development, deployment and commercialization of 6G network technologies in the North American market [27].

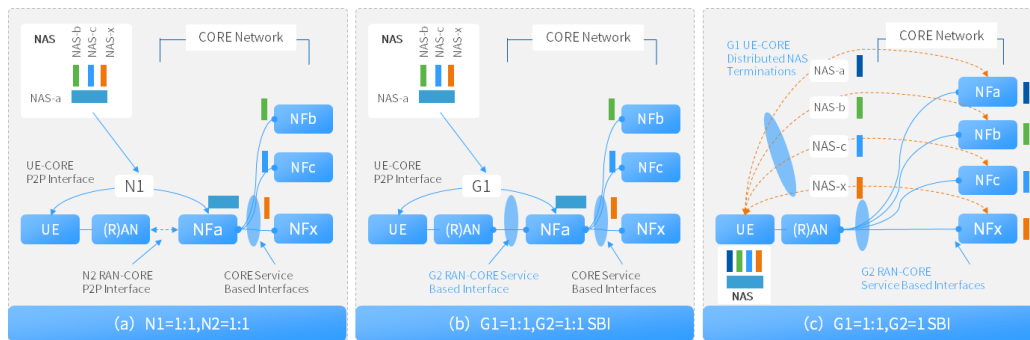


Figure 2-6 Next G Network Architecture Based on Service and Distributed Non Access Stratum (NAS)

In addition to the major 6G promotion organizations, major operators and device manufacturers in the industry have also put forward their research ideas for 6G network architecture. The “three-body, four-layer and five-plane” overall architecture designed by China Mobile for 6G network includes three entities, namely network ontology, management and orchestration body, and digital twin. The logical layer of the network ontology is further divided into “four layers”, namely resources and computing power, routing and connection, service-based functions, and opening enablement. In addition, the functions of traditional control plane and user plane are enhanced, and new data plane, intelligence plane, and security plane are introduced to form the “five planes” [16]. In their joint White Paper *6G Common Requirements*, SK Telecom and NTT docomo propose that Open RAN will become the default form of 6G as well as higher requirements of network cloud-native and network automation functions for 6G [28]. Huawei believes 6G network architecture should focus on network original AI, task-oriented connection, multi-mode trust architecture and user-centric customized services as the design paradigm [6]. Ericsson’s research on 6G network architecture focuses on the development of a new radio access network consisting of a “distributed radio,

computing and storage architecture” based on cell-free MIMO technology [5]. Based on the first set of 5G computing-aware network full-stack software infrastructure products in the industry [29,30], AsiaInfo further proposes a computing native network architecture^[31] based on the joint communication, sensing and computing characteristics of 6G, with computing native network capable of using an intelligent communication and computing scheduling orchestration decision mechanism to improve network system resource utilization and reduce 6G network energy consumption while guaranteeing the quality of 6G communication and computing business.

2.4 Influence of 6G Potential Key Technologies and Network Architectures on 6G OSS

In addition to improving 6G network performance, potential key technologies and network architecture also put forward new requirements and challenges for the technology development and architecture evolution of 6G OSS, which can be summarized in the following five aspects:

- **Requirements for improving network operation capability for 6G new architectures and technologies**

Space-air-ground integrated networking technology requires 6G OSS to support network collaboration and convergence of air-based, space-based and ground-based networks and network orchestration of space-air-ground integrated networking. Technologies such as extra-large-scale MIMO and reconfigurable intelligent surface will enable a significant increase in the number of parameters related to wireless network communication business, while the dynamic regulation of RIS systems and the beamforming for the combination of RIS and MIMO bring a new optional dimension to the planning and optimization of network infrastructure coverage in 6G OSS. The service-based access network and distributed autonomous network technologies also require 6G OSS to support the network O&M for the full-stack service-based architecture and distributed networking architecture of 6G core and access networks. Therefore, the breadth, dimension, and depth of 6G OSS are faced higher demands, posing a significant challenge to network operation complexity.

- **OSS native capability requirements for ubiquitous intelligent 6G networks:** native intelligence, native network security and digital twin are potential key technologies for 6G networks, which also requires 6G OSS to have end-to-end management capabilities for network native intelligence, the native AI capabilities of the OSS itself, and DTN capabilities, to support the autonomous network evolution of network planning, construction, optimization, and maintenance, while 6G OSS itself needs to have native network security capabilities to ensure network data security , user privacy and provide the O&M support for network native security functions. How to achieve the transformation from network external artificial intelligence and security to endogeneity, and from network simulation to digital twins, is a key technical problem that 6G OSS must solve.
- **Orchestration and management requirements for joint communication, sensing and computing business for 6G networks:** joint communication, sensing and computing for 6G requires the networks to have physical-digital space sensing, ubiquitous intelligent communication and computing capabilities at the same time, and the network element (NE) devices in the network to realize the deep integration of multi-dimensional sensing, cooperative communication and intelligent computing functions through the collaboration and sharing of hardware and software resources for communication, sensing, and computing. This requires 6G OSS to have the orchestration and scheduling capabilities for the communication, sensing and computing resources generated by joint communication and sensing business and joint communication and computing business. The key challenges that must be addressed by 6G OSS orchestration management include effectively dealing with the exponentially increasing complexity in orchestrating objects, as well as integrating existing piece partition to achieve seamless scheduling.
- **Requirements for empowerment and social responsibility for 6G networks:** IMT 2030 and 5G PPP Architecture Working Group put forward that 6G networks features including flexible opening capability, which requires unified service-based opening management of network capabilities through 6G OSS, to realize on-demand flexible opening of 6G network capabilities and empower the digital and intelligent transformation of the industry. In addition, 6G OSS also needs to support 6G networks to better perform social responsibilities in sustainable development and public safety.

- **Requirements for convergence of 6G networks and new IT:** 6G network architecture and rich business types add to massive network data scale and network O&M complexity. As a result, 6G OSS needs to combine data governance technology to improve data management efficiency and data application value and, by introducing RPA technology, fully realize the hyperautomation of 6G network planning, construction, maintenance, optimization and operation. In addition, 6G OSS needs to support the evolution of 6G networks to full-stack service. Hence, 6G OSS needs to address the challenges arising from a more extensive array of technological advancements.

III. Progress in Standardization of OSS-related Network Management

In June 2022, ITU-R WP5D released *Future Technologies Trends Towards 2030 and Beyond*, the ITU's first research report on 2030 and future IMT. The report covers key technology directions such as AI and wireless communication convergence, joint sensing and communication, wireless air interface technology enhancement (such as large-scale antennas, modulation coding and multi-access, and high-accuracy locating), new dimensional wireless communication (such as reconfigurable intelligent surface), Terahertz communications, and wireless network architecture. In addition, the Working Group is preparing the *Future Technology Vision Proposal*, which contains the overall objectives of the IMT system for 2030 and the future, such as application scenarios, and major system capabilities. 3GPP will begin the work on 6G vision, technologies, and requirements study. The Rel-19 in 2023 will not only define new capabilities for 5G systems, but also provide guidance on the necessary capabilities of 6G systems. It is expected that 3GPP will start the standardization of 6G technology in the second half of 2025 (the 6G standard is expected to be completed in the first half of 2028), and 6G devices and products are expected to be available in the second half of 2028.

The core role of OSS is to ensure network performance and improve the efficiency of network management, which is the focus area of major standardization organizations. In the past decades, 3GPP, ITU, TMF, ETSI and O-RAN have continued to promote OSS-related standardization to meet the needs of operation, maintenance and management of communication networks at different stages of development. Combining the scope of work of different standardization organizations and the working principle of coordination and support, ITU, as an authoritative international standardization body for communication under the United Nations, focuses on the overall architecture and principles of network operation, maintenance and management. 3GPP focuses on the specification for network-side element management function design and interface. ETSI

focuses on the specification for network management technologies based on network virtualization. O-RAN focuses on the new network management mode based on open RAN and its implementation path. TMF, an authoritative and professional international organization for telecom operation and management, systematically and comprehensively studies technologies and specifications in relation to business support and network operation management.

3.1 3GPP Network Management Standards

3GPP SA5 is mainly responsible for the standardization study of 3GPP network management, including network operations, administration, maintenance and provisioning. The current 3GPP SA5 standard research in the Rel-18 phase focuses on three fields, namely network intelligence and network automation, network management architecture and mechanisms, and new business support ^[32].

The academic community has been focusing on using data analytics to provide the necessary support for network intelligence for many years. To support network intelligence, 3GPP introduced the network data analysis function (NWDAF) at the network function layer and the Management Data Analytics Service (MDAS) at the management layer. Network data analysis function (NWDAF), based on standardized service interfaces, provides on-demand, fast and accurate intelligent analysis services to 5GC/OAM/AF, supports flexible deployment in multiple scenarios, meets application requirements at different levels, enables 5G network functional entities, and realizes a low-cost and high-efficiency intelligent closed loop for operator networks. According to the R18 edition, NWDAF has been strengthened and decoupled, with the logical analysis capability separated to Analytics Logical Function (AnLF) dedicated to data analysis, and supporting the invoking of machine learning models and capabilities and recalling of other NWDAF data through tree cascade for joint analysis. The machine learning models and capabilities are centralized into Model Training Logical Function (MTLF) for unified management. In addition, the Data Collection Coordination Function (DCCF) has been enhanced as a standalone function for data collection, the Messaging

Framework which supports non-3GPP standardization and the Messaging Framework Adaptor Function (MFAF) of 3GPP standard interface have been added, and the Analytics Data Repository Function (ADRF) for repository management of data analysis has been established. Management Data Analytics Service (MDAS) is a public MDA service that analyzes the data in the management domain, supports data analysis within RAN or CN domain or across domains, and supports interfaces and interactions with NWDAF. MDAS can be used by a variety of consumers, such as MNF (i.e., MnS service provider/consumer for network and service management), NFs (e.g., NWDAF), SON functions, network and service optimization tools/functions, SLS assurance functions, human operators and AFs.

According to the 3rd Generation Partnership Project (3GPP), the standardization process for 6G technology is expected to commence in the latter half of 2025 (Rel-20), with the completion of 6G standards estimated to occur in the first half of 2028. Subsequently, it is anticipated that market-ready 6G devices will become available in the latter half of 2028[28]. Looking ahead for the next five years, 3GPP SA5 is poised to undertake cutting-edge research on various standardization topics related to 6G OSS, including but not limited to space-air-ground integrated network orchestration and joint communication, sensing, computing scheduling.

3.2 ITU Network Management Standards

The TMN (Telecommunications Management Network) standard, an international standard for telecommunications network management developed by ITU-T (International Telecommunication Union-Telecommunication Standardization Sector) since 1985, is the most widely accepted foundational standard for telecommunication operation management, construction and operation. TMN has defined the interconnection point between two networks and specified the related network management functions, and successively released a series of TMN recommendations including M.3010, M.3400 and X.700. The management of TMN consists of five layers, which are, from bottom to top: Network element layer (NEL), element management

layer (EML), network management layer (NML), service management layer (SML) and business management layer (BML), among which, the NEL is a managed layer and the other four layers are managing layers. ITU-T also delineates the five generic management functions provided by the network management system, namely FCAPS (Fault, Configuration, Accounting, Performance and Security) as a complement to the TMN.

ITU-T's current standard research in network management mainly involves two research groups, ITU-T SG2 and ITU-T SG13. The former has proposed a series of standard development projects for AI-enhanced Telecom Operations Management (AITOM), while the latter has launched focus groups for the research of Autonomous Networks and Network 2030, respectively [34,35,36,37].

Looking towards 2030, ITU-T SG13 has established the Focus Group on Technologies for Network 2030 (FG NET-2030) in 2018-2020 to explore network requirements, enabling technologies, and the expected evolution of IMT-2020 (5G) IMT systems for 2030 and beyond, as well as the new forward-looking scenarios that networks are expected to support for 2030 and beyond, such as holographic communications, extremely fast response in critical situations, and high-precision communication needs for emerging networks. At the same time, the projects for network O&M and management that meet the emerging needs and scenarios will also evolve on the basis of the existing architecture.

3.3 TMF Network Management Standards

TMF (Telecom Management Forum) is a worldwide organization dedicated to providing strategic advices and implementation solutions for telecommunications operations and management. It is a global, non-profit association focused on operation support system (OSS) and management issues in the communications industry. Since its inception in 1988, its leading information resources, knowledge and technology solutions have been widely recognized by the industry. The NG OSS (Next-Generation Operations Support Systems) function model proposed by TMF, which includes four framework models, i.e.

eTOM, TAM, SID and TNA, is widely accepted by international telecom operators and device manufacturers as well as developers of telecom operation support systems, and has become a de facto international standard. With a view to meeting the new demands of the communications industry in the future, which is driven by the digital intelligence and featured by ubiquitous connectivity and false or true complement, TMF has launched the ODA (Open Digital Architecture). TMF ODA has used a new approach to replace traditional Operation Support System and Business Support System (OSS/BSS) to build software for the telecom industry, so that standardized cloud-native software components could go to market and communications service providers and vendors could invest in IT for new and differentiated services^[38]. TMF provides an evolutionary path towards a plug-and-play architecture that builds on the TMF Business Process Framework (eTOM), Information Framework (SID), open APIs, Data Analytics and AI, Customer Experience Management, and Digital Ecosystem Management and enables cloud-native plug-and-play IT and networking via standardized, reusable and software-defined components connected by open APIs.

In terms of automation, the AIOps Service Management Framework put forward by TMF is an evolution and supplement to the existing IT frameworks (DevOps, Agile, ITIL, etc.), in which some specific principles and practices are specified and introduced. It is suggested that a hybrid management for AI and traditional applications needs to be adopted and implemented in a complex operation environment. The AIOps Service Management Framework addresses the technical and operational processes needed to deploy and integrate significant numbers of AI components and their relevant business capabilities into existing CSPs' IT and Network operations.

In terms of intelligence, “intent” is introduced in TMF’s Autonomous Networks project to layout the requirements, goals and constraints of users, so that the system can adjust its operation accordingly and interact with users in different domains. In the lower and middle levels of the Autonomous Networks hierarchy (e.g., L0 to L3), the requirements, goals and constraints of users can be implemented using policy-driven operations and requirements carried on existing interfaces. Systems with higher levels of the

Autonomous Networks (e.g., L4 to L5) will be capable of automatically adjusting its behavior through intent-driven interactions, thus reducing human intervention. This capability will enhance business agility by introducing new, customized service offerings that do not require human intervention ^[38].

3.4 ETSI Network Management Standards

ETSI project groups involving network operations management mainly include ETSI Zero-touch network and Service Management (ZSM), ETSI Network Function Virtualization (NFV), and ETSI Experiential Networked Intelligence (ENI).

ETSI ZSM is working on the definition of a horizontal and vertical end-to-end operable architecture framework, solutions, and implementation of core technologies to enable agile, efficient and qualitative management and automation of emerging and future networks and services. Horizontal end-to-end refers to cross-domain, cross-technology aspects. Vertical end-to-end refers to cross-layer aspects, from the resource-oriented layers to the customer-oriented layers. The goal is to have all operational processes and tasks (e.g., delivery, deployment, configuration, assurance, and optimization) executed automatically, ideally with 100% automation ^[39].

ETSI NFV is primarily responsible for addressing new functional and operational requirements brought about by advances in virtualization and cloud technologies, network management, orchestration, as well as new use cases (e.g. industry verticals) and operational models. Primarily, this includes virtualized network platforms that will be capable of supporting automated (and even autonomous) management of all application-independent aspects of virtualized services, ranging from the management of the virtualized resources they use to the management of the network functions they combine. NFV-defined MANO (network functions virtualization management and orchestration) is an architectural framework for managing and orchestrating virtualized network functions and supporting software components for deployment and connectivity on virtual machines ^[40].

ETSI ENI provides a model-based, policy-driven and context-aware ENI system to enable network intelligence. ENI allows the association of Designated Entity to be done directly or indirectly via an agent system. A Designated Entity can be an NMS, EMS, controller, or current or future management and orchestration systems. The ENI system is based on an experienced architecture and accumulates experience in accordance with the self-learning principle to continuously improve operational efficiency, and enable the system to perform full-process closed-loop control over time from proposal to decision implementation. In addition to network automation, the ENI System assists decision-making of humans as well as machines to enable a more maintainable and reliable system, and offers context-aware service that enables the operator to adjust the offering of services in response to contextual changes ^[41].

3.5 O-RAN Network Management Standards

O-RAN aims to build an open, virtualized and intelligent radio access network (RAN) architecture and a vibrant and competitive ecosystem which supports interoperability among different vendors and devices ^[42]. Based on the traditional network architecture, O-RAN introduces the wireless network intelligent control platform, wireless intelligent manager and open and standardized interfaces at the edge of the network.

O-RAN uses a three-tier architecture, which consists of, from the bottom to the top: Cloud platform (O-CLOUD), O-RAN network function, and the service management and orchestration (SMO) framework, among which, the SMO functions as an equivalent to the OAM or NMS for network operation and management subsystems of the traditional closed RAN access network device.

Network intelligence is one of the four focus topics of O-RAN. The network management of O-RAN system is different from the traditional closed network management in that the O-RAN operation is highly intelligent and the network functions are service-oriented and customizable. Unlike the traditional solidified network management which is oriented to a single manufacturer, the network management provided by O-RAN is a Service that can be invoked, and SMO is the integration of

multiple management services. In the O-RAN architecture, SMO mainly manages RAN domains, such as: FCAPS interface for O-RAN network functions, O-Cloud management and orchestration, workflow management and other functions and interfaces, as well as Non-Real Time RIC functions and interfaces for non-real-time RAN optimization intelligent control loops of over 1s.

IV. Overall Vision of 6G OSS

On the basis of 6G vision and requirements, and taking into account the core support role of OSS for 6G networks, the overall vision for 6G OSS can be summarized into the following five aspects.

Realizing the Evolution from Monolithic/Single-Domain Network Management to Space-Air-Ground and Communication-Sensing-Computing Integrated Management

The existing 5G OSS supports the management of mobile communication network and communication resources, and provides intelligent O&M for the full life cycle of 5G networks. 6G OSS will extend from the management of mobile communication networks and communication resources to the integrated network management including terrestrial cellular networks, high-orbit satellite networks, medium- and low-orbit satellite networks, high altitude platform stations, UAVs, and multi-dimensional resources including communication, sensing, and computing, providing ubiquitous communication, computing, and sensing support through three-dimensional management capabilities to improve the resource and energy utilization of 6G systems.

Expanding from Intelligent Network Management to Automated, Intelligent and Digital-twin Network Management

In 5G network operations management, the network and AI, as two general-purpose technologies, have improved network operation efficiency via network intelligence. Given complex 6G systems featuring space-air-ground integrated network and joint communication, sensing and computing, 6G OSS needs to build comprehensive capabilities combining automation, intelligence and digital twin to meet the O&M requirements for the full life cycle (i.e., planning, construction, maintenance, optimization and operation) in 6G and provide unprecedented experience of digital 6G services.

Evolving from L5 5G Autonomous Networks to 6G OSS Ready

Currently, the autonomous level of 5G networks is evolving towards the medium and high levels (L3 to L4), and is expected to reach the highest level (L5), i.e., to have a full-scenario closed-loop mobile communication network autonomous capability across multiple services, multiple domains and full life cycle. On the basis of high-level autonomous network, 6G OSS will, based on the integration of communication, sensing and computing, realize the native intelligence, and evolve towards the in-depth integration of total automation, high-level native intelligence and the network digital twin, expand the scope of autonomous space-air-ground integrated network, and realize the vision for 6G, i.e., the intelligence of everything and the digital twin.

Incorporating Environmental, Social, and Corporate Governance (ESG) into 6G OSS Capability System

The network energy consumption has come to the fore with the construction and development of 5G networks. As an information infrastructure, the existing mobile communication network may offer to some extent information security for ESG, but faces more external requirements from ESG. As a new type of information infrastructure, 6G will incorporate ESG into 6G OSS capability system at the design phase, and based on the space-air-ground integrated network, the joint communication, sensing and computing and other global coverage capability and the green and low-carbon network construction, it will ensure that the 6G communication system will fulfill more ESG and public safety responsibilities and support the achievement of the carbon peaking and carbon neutrality goals.

Constructing a Secure and Trustworthy 6G OSS

High security is an important feature of 6G networks, which requires the construction of a new paradigm for native network security in cyberspace. As the core management support plane of 6G networks, 6G OSS should make full use of automation, intelligence, digital twin capabilities and network orchestration, management and scheduling capabilities to construct a natively safe and secure OSS, so as to provide services and assurances for 6G networks and applications.

V. 6G OSS Technical Framework and Key Technologies

5.1 6G OSS Technical Route

6G OSS is a network operations management system for future networks, the key technologies of which require comprehensive analysis from various aspects such as network requirements, system evolution and technology direction. As shown in *Figure 5-1*, the technical research idea for 6G OSS mainly consists of the following aspects:

- Key network operations management technologies required to support new technologies, architectures and services for 6G networks;
- Key technologies required to upgrade and extend functionality based on existing OSS standardized network operations management system;
- Key technologies for intelligent OSS network O&M that support network intelligence and autonomous network evolution;
- Key ICT convergence technologies required to apply new IT to OSS.

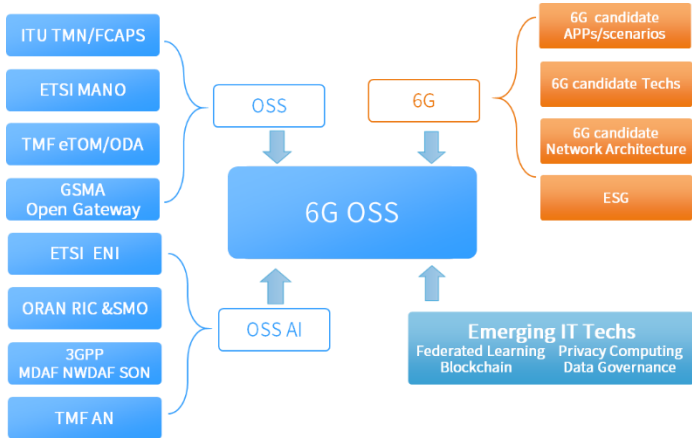


Figure 5-1 6G OSS Technical Route

5.2 12 6G OSS Potential Key Technologies

5.2.1 6G OSS Orchestration for Space-Air-Ground Integrated Network

The 5G OSS network orchestration enables automated activation of 5G services. 6G OSS will support the space-air-ground integrated network, realize the deep integration of air-based, space-based and ground-based networks, as well as the unified supply of networks, computing and storage resources, and provide information services anywhere and anytime, in any way. In response to the requirement of the space-air-ground integrated network integration, in addition to horizontally connecting the services based on virtual network functions, 6G OSS network orchestration is also required to realize the longitudinal connection of the space-air-ground integrated network domain, as well as the flexible scheduling of various resources such as network, computing, storage and data, so as to meet the requirements of the space-air-ground integrated network business. As shown in *Figure 5-2*, due to the significant differences in communication performance, coverage and link quality of 6G space-air-ground nodes, as well as the three-dimensionality, diversity, time-varying nature and scalability of the integrated network, 6G OSS network orchestration requires three-dimensional deployment and flexible scheduling of space-air-ground integrated network functions and multi-dimensional resources to realize the integration and complementary advantages of space-air-ground integrated networks and improve the flexibility, effectiveness and timeliness of network orchestration, so as to meet the requirements of different application scenarios and business SLA requirements.

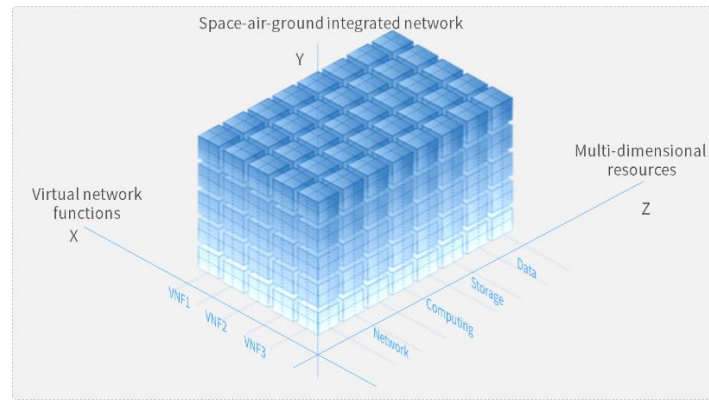


Figure 5-2 Three-dimensional and Flexible Network Orchestration of 6G OSS

6G OSS network orchestration collects the data of space-air-ground integrated network in a real-time or non-real-time manner, including various network resources, spatial information, configuration parameters, network protocols, interfaces, routing, signaling, processes, performance, warnings, logs, status and other data information. It enables accurate understanding of user's business requirements via intent-based network technology. Based on business understanding, collected data, policy rules, operation manuals, expert experience, etc., and by means of data + knowledge-driven AI capability, it recognizes real-time status of the network, predicts the trend of network status, network malfunction occurrence and location, and changes in service demand, etc., forms network orchestration decision for business SLA, and realizes end-to-end orchestration and control for space-air-ground integrated network functions and multi-dimensional resources.

Enhanced Intent-Based Network Technology

An accurate understanding of user intent is a prerequisite for network orchestration to meet business requirements. Users input their intent through natural language such as speech and text, and the intent-based network technology will transform the user intent input into a network intent expression model and design a policy. In the complex 6G space-air-ground integrated network environment, the intent-based network is required not only to achieve translation of user intent into network expression, but also to accurately fill in the network policy templates and verify the intent and policy, which requires enhanced intent-based network technology from 6G OSS. Using a large

multimodal pre-trained model represented by GPT-4 as the engine, this technology allows the network managers to learn about the network O&M policies with different requirements in a more efficient way by inputting a simple intent for O&M which goes through multiple rounds of interaction, and verify the realization of the intent based on the network data obtained after the network policy is issued. At the same time, the brain-computer interface, as a new way of control and communication, is important in the development of future-oriented science and technology innovation, and the application of brain-computer interface in enhanced intent-based network technology will gradually become possible. Through the brain-computer interface, users are no longer required to express their intents indirectly via speech and text, but directly through their brain consciousness, thus enabling more accurate and efficient translation into network expression.

Network Telemetry-based Real-time Data Collection Technology

The space-air-ground integrated network is highly time-varying and dynamic, and has a high requirement for real-time data collection. Network telemetry-based technology remotely collects data from physical or virtual NEs at high speed in real time to build a standard data model and supports continuous reporting with one subscription. The data collected is highly accurate and abundant in type, and can fully reflect the network condition. The network telemetry-based technology allows the OSS to manage more devices, and the data collection process has little impact on the function and performance of the network, which enables real-time, high-speed and more detailed monitoring of the network and provides a big data base for network orchestration.

Intelligent Orchestration Technology

The space-air-ground integrated network orchestration is targeted at network nodes of multiple functional types and resource types. It performs functional abstraction and softwareization for the behaviors and capabilities of network devices to form virtual network functions, and virtualizes the network, computing, storage, data and other multi-dimensional resources at the nodes to design the smallest service units and multi-dimensional resources that can be orchestrated. The intelligent orchestration horizontally

connects the virtual network functions to form a collection of business-oriented network functions. It also vertically connects the space-air-ground integrated network to realize the flexible scheduling of multi-dimensional resources such as network, computing and storage resources. Intelligent orchestration mainly performs the following functions: it provides a unified node capability evaluation system, where node capability is carried by flexible resources, and the performance of the node may show a precipitous decline when resource consumption at the node exceeds the security boundary, so it is necessary to ensure that the scheduling of flexible resources meets the node performance security requirements; it maps the business SLA requirements with the requirements for network functions and multi-dimensional resources, such as the required end-to-end link bandwidth; it performs comprehensive analysis and decision making for dynamic network global topology based on performance, resources, economy, green, security and other factors, so as to realize the output of the current optimal network orchestration policy based on AI model to guide the execution of network functions orchestration and resources control, and select the network nodes and security resources that assure user business SLA; and it evaluates the execution effect of relevant policy orchestration, and updates network knowledge based on the data about network state change brought by the orchestration policy, so that the AI model can be continuously trained and deployed, and the orchestration policy can be continuously optimized.

5.2.2 6G OSS Management for 6G New Wireless Technologies

Management Technology for NEs in New Forms

The NEs introduced by 6G networks add to the complexity of object attributes managed by OSS. The new attributes of space-based and sea-based NEs, which are brought about by space-air-ground integration, require OSS not only to establish corresponding records of attribute parameters, but to provide management and control according to the attributes of the new NEs. For space-based NEs, the management and control include satellite system configuration, satellite load management, inter-satellite communication link management, and feeder link management. As the reconfiguration of the radio

channel environment brought by reconfigurable intelligent surface (RIS) is required to be realized in collaboration with the network, 6G OSS should be capable of controlling the RIS surface. For the management of RIS surface, it is necessary to add control capability for its unique reflection characteristic parameters, RIS surface position management and other functions. For the scenario where the ambient multipath transmission is increased through RIS in a complex deployment environment, it is necessary to combine the base station with the RIS surface for the channel measurements and feedback. To support the communication and sensing capability, 6G OSS will support management functions for various sensors. There are a variety of sensors, leading to significant differences in the attributes of sensing data corresponding to different sensing capabilities. The location and environment in which the sensors are deployed in the network must be adapted to the specific environment. One of the new capabilities in the diversified network element management of 6G OSS will be the life-cycle state management of the sensors. With a more intelligent IoT communication capability, 6G OSS should also be provided with corresponding machine intelligence management and control capabilities, for instance, management of AI models that can be invoked for intelligent decision-making for IoT, control of information and information model sharing among multiple types of IoT devices, and decision generation management. To cope with the intelligent IoT, 6G OSS will evolve corresponding control and management capabilities in accordance with the evolution of future IoT networking technologies.

Communication and Sensing Data Management Technology in New Wireless Networks

Given the joint communication and sensing technology, the OSS correspondingly increases the storage of sensing data. The expansion of the data domain dimension of OSS management, the management of sensing data, and the utilization of sensing information, will become the new content of OSS data domain management. The management of 6G OSS data domain will evolve towards the management of data information. Thanks to the native intelligence of OSS, the data information fusion in a higher dimension will be added to the data processing by 6G OSS. 6G OSS data domain

management collection is composed of 5G network operation data, network service awareness data, wireless environment awareness data, and network intent-derived configuration policies. With native AI capabilities, OSS models the above high-dimensional information and generates network adjustment policies to guide the network to autonomously adjust and optimize resource allocation and performance.

Intelligent Data Direction and Routing Management Technology

The data direction control in OSS management is more complex. With communication and sensing technology, space-air-ground integration technology, and de-cellularization technology introduced into 6G systems, the data within 6G networks becomes more complex, and the data distribution and routing management, service QoS, and data distribution options for QoE assurance will be more complex and diverse. At the same time, as AI becomes more native and mature, AI capabilities for data distribution and routing management will evolve within the OSS.

For communication and sensing, to generate a network resource orchestration policy that guarantees the service quality requirements while maximizing the system performance, 6G OSS needs to process the sensing data into sensing information, and then combine it with network resources and service quality requirements. For space-air-ground integrated network, the OSS needs to deal with the convergence and scheduling between satellite forwarding and the routing within the ground system. For the data path of monolithic service, the difference in latency between forwarding via multiple nodes or via a single-hop satellite link during terrestrial fiber transmission as well as the difference in communication link quality should be taken into account. The overall service provisioning capability and service quality assurance for the local network are also limited by the capacity of forwarding per hop, and the constraints on capacity at each node of the path should be reasonably predicted when developing the forwarding of monolithic service. The development of MIMO technology has led to the joint transmission of massive distributed antennas, and this technological evolution will change the design of cellular structure of 5G networks. For the cell-free network structure, 6G OSS should be provided with the capability to manage the data

transmission relationship of a transmit and receive (T/R) antenna pair (a T/R pair formed by a transmit antenna to a receive antenna) or a virtual antenna pair formed by multiple physical antennas. In a multi-user environment, the connection relationship between the communication link of distributed multi-antenna and each user must be reasonably designed to control the interference to the data link of other users while meeting the service transmission requirements of different users.

New Type of Network Optimization in Cell-free Mode

Due to the cell-free mode of the network, the calculation of network quality evaluation KPIs, network management objects, and O&M methods in corresponding network deployment area will be very different from those in the network quality management as well as O&M in the traditional cellular network configuration. First, the acquisition of KPIs for network quality evaluation will be descended from the sector level to antenna level, the future distributed MIMO will feature massive antenna scale, and the magnitude of antenna-level data directly collected by the network will increase geometrically. Second, the object of network management will descend to the transmit and receive antenna pairs. Because of the time-varying nature of data services and the spatial dynamic characteristics generated by user movement, the relationship between transmit and receive antenna pairs will change two-dimensionally in time and space, and the difficulty of network management will increase abruptly. Third, in a cell-free area, the maintenance of the network requires considering not only the physical deployment location of antennas, the physical connection between antennas and DU, but also the relationship between the sidelobes of transmit and receive antennas and the orientation of the surrounding antennas in a multi-user access environment, and it highly depends on the multi-antenna interference analysis based on digital twin simulation to quickly iterate a reasonable antenna adjustment solution and beamforming solution.

Full Spectrum Cooperative Management Technology in New Networking Mode

Many of the new technologies used in 6G networks, such as MIMO enhancement technology, Non-orthogonal multiple access, full duplex technology, and frequency space multiplexing of air-ground systems, are accompanied by the need for more

efficient network cooperative management in local areas of the network while improving spectrum utilization efficiency. By coordinating the scheduling on the base station side with the native AI capability of CU/DU, the problem of resource coordination among the cells in the base station can be solved. In the mobile communication network, the analysis of coverage capability also includes the evaluation of coverage effect for cell clusters and larger contiguous areas, with the latter usually defined as spaces which are continuously distributed in geographic space and have obvious common characteristics in wireless signal coverage scenarios, such as college campuses, subway stations, office buildings, and residential areas. For such continuous coverage areas, reasonable allocation of network resources is usually not achievable by resource management at the base station level. With the resource management of distributed OSS and its native AI capability, it is possible to achieve optimal local interference management and resource collaboration, with distributed OSS, effective enhancement of the coordinated coexistence of multiple new technologies in 6G networks and providing locally optimal wireless resource utilization solutions for local networks. In the border area controlled by distributed OSS, it is possible to achieve relatively simple interference coordination among distributed OSS in a cooperative manner to meet the service quality requirements of the border area.

5.2.3 6G OSS Capability Opening

The network capability opening helps to enhance the value of operators' networks and improve user experience. With the development of SDN, NFV, cloud native and other technologies, network capability opening has become one of the key technologies in the 5G era. In terms of capability opening of 5G networks, NEF (Network Exposure Function) is introduced in the 3GPP standards, which provides convergence and opening of 5G network capabilities to the outside world, including opening to other 5GC (5G Core Network) elements internally and AF (Application Function) externally, such as the opening of event monitoring capabilities, QoS capabilities and parameter configuration.

In the 6G era, the 6G network will continue to move toward opening with the convergence of DOICT technologies, further enriching the information and capabilities open to the public. For better support of new service scenarios in 6G, 6G OSS needs to open its comprehensive capability management capabilities so as to provide services for its own services and third-party applications through the acquisition, orchestration and scheduling of communication, sensing and computing capabilities. Based on current research in industry and academia on potential key technologies and architectures for 6G networks, it is suggested that the following key technologies should be included in the capability opening of 6G OSS.

Capability Opening Technology Based on GSMA Open Gateway

The new digital service scenarios such as 6G inclusive intelligence services and joint communication, sensing and computing require standardized and fully connected opening network capabilities. Taking this into consideration, GSAM has proposed the Open Gateway technology framework, aiming to provide application developers with universal access to the operator's network, achieve a paradigm shift in the design and the way services are provided in the telcos, and help developers and cloud providers enhance and deploy services more rapidly in the operator's network through single-point access to the world's largest connectivity platform. More Open Gateway-based APIs and services have necessitated the capability of 6G OSS to manage and schedule these APIs, which mainly includes:

- Full life cycle API management: Managing the on/off-shelf and editing of API
- API Order management: Enabling customers to place orders quickly based on network SLA, open capacity and other requirements
- API scheduling management: Realizing the scheduling management of API and required resources
- API operations management: Realizing the monitoring and maintenance management for the operation and resource status of API

In this way, it can efficiently support the construction of capability opening system of 6G Open Gateway and provide users with the standardized and fully connected opening of required 6G network service capabilities.

Capability Opening Technology Based on TMF Open API

For new digital service scenarios such as communication-aware convergence and its reliable communication, 6G OSS needs to build a 6G OSS API System (as shown in *Figure 5-3*) according to the CRISP-DM knowledge discovery process model, in order to provide basic service capabilities such as data processing service, model training service, model publishing service, and model deployment prediction service. In addition, it will provide authority management service, resource control service, status monitoring service, and system security service with reference to the TMF Open APIs framework to ensure that the system is highly available.

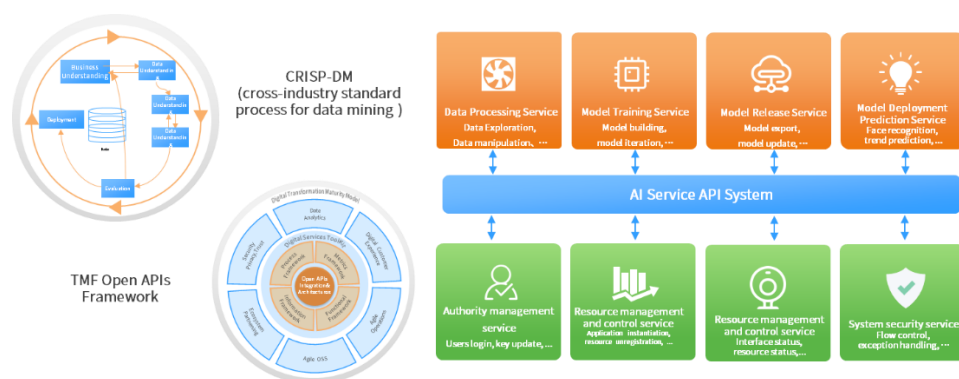


Figure 5-3 API System of 6G OSS

Digital Capability Opening Technology

As user experience centricity has become one of the goals of 6G networks, the 6G OSS will likewise need to leverage digital technologies (e.g. digital twin, voice recognition, etc.) to open 6G OSS capabilities and the unprecedented digital experience of 6G services to operators and consumers. To improve the O&M experience of 6G private network, the technical capabilities such as computer vision-based interface and IT troubleshooting, IoT sensor and biometrics-based user management, etc. will be provided. To improve the business application experience, such capabilities as speech

recognition-based services, robotics-based QoE improvement and AR/VR/MR/XR-based QoE improvement will also be provided.

Data Opening Technology Based on Privacy Computing and Blockchain

With the new data plane, the 6G network architecture will generate more valuable data. On the one hand, 6G OSS, given the distributed network architecture of 6G, needs to realize the automatic data acquisition at each distributed node, and enhance the standardized network data opening function and interface, and assure the data security based on blockchain technology. On the other hand, facing the requirements of services for data, 6G OSS needs to realize the 6G data management based on privacy computing to enhance the value circulation and opening capability of data.

Capability Opening Technology Based on Programmable Network

Some explorations and improvements for network programmable technologies have already begun in the 5G era. For example, the control plane of 5G core networks based on SBA architecture is designed with cloud native software, which enables the rapid construction, release and deployment of control plane network functions in 5G core networks; the decoupling of network functions from underlying hardware and operating systems is realized in combination with cloud computing. In the 6G era, the programmable technologies will evolve from the programmability at the control plane to that at the user plane. The network functions of the service-based control plane can be deployed in a containerized and cloud-native way, with the configurations distributed down to the user plane using the network controller. 6G OSS, based on the programmable capabilities of the network, will provide users with more customized services and faster response, mainly including:

- Flexible and fast network service deployment: 6G OSS, based on network programmable capability, allows flexible definition of logic and functions of network control plane, user plane and data plane. This helps to reduce redundant designs and unify network service capabilities to provide innovative communication services with higher agility and flexibility and support faster deployment of services.

- Intelligent scenario development: Based on different deployment scenarios or use cases, 6G OSS enables flexible customization of network capabilities through network programmable capabilities, and introduces AI into network service design and deployment implementation for faster access to network capability upgrades.

5.2.4 6G OSS Support for 6G Full-stack SBA

Full-stack SBA is one of the important trends in the evolution of 6G network architecture. Full-stack SBA is the expansion of service-based architecture in the user plane of access network and core network. Meanwhile, it represents a further deepening of service-based architecture with enhanced service framework, service interface, and atomic services to accommodate distributed organization of networks, intelligent scheduling of services, and flexible deployment of industry private networks.

To support the servitization of 6G full-stack SBA, 6G OSS requires technological evolution in the following three aspects:

Supporting the Expansion of Service-based Architecture in Network Fields

The servitization of 6G networks will be further expanded in multiple network fields, but in different ways for different network fields. In the field of core network, the servitization design method in the management plane is different from that in the control plane. The functional NEs in the management plane will incorporate a series of MnS or MnF integrating a series of MnS, while the interaction between different management functional NEs will be realized through a standard API interface. The user plane NEs may also be service-based which will help UPF NEs provide more basic UPF services to more NEs, while gRPC protocol may be adopted at the servitization interface of UPF. The service-based structure is also necessary for wireless networks. A service-based interface needs to be defined between the core network and the RAN on the one hand, and between the user plane and the physical layer on the other hand in order to decouple the user plane from the physical layer and promote the integration of multiple lower-layer access technologies in the physical layer.

As the servitization of 6G network progresses, 6G OSS will become a major carrier for service orchestration and service control in the full-stack service-based architecture. At the same time, the way it manages the O&M of wireless and core NEs will evolve from the traditional element management to the dynamic management of microservices, which is realized by connecting with the microservice interfaces of various network domains through API interfaces.

Supporting the Evolution of Service-based Interface Protocol

In the service-based architecture of the 5G core network, 3GPP implements the SBA interface with the features of RESTful architecture by combining HTTP2 protocol with TLS/TCP (Transport Layer Security/Transport Control protocol) protocol. However, the application of TLS/TCP protocol also caused insufficient interface security and transmission rate. Therefore, in the evolution of 6G full-stack SBA, the QUIC protocol conforming to the HTTP/3 standard, may also be used. The QUIC protocol, while ensuring network reliability, improves the congestion control mechanism of TCP and effectively reduces the time for connection establishment, and also avoids Head-of-Line blocking during multiplexing. In order to facilitate the adoption of full-stack SBA in 6G OSS, it is essential to support SBA interfaces based on various protocols such as HTTP2 with TLS/TCP combination and QUIC.

Supporting the Evolution of IP Transport Protocol

The design of traditional IP transport protocols follows the principles of statistical multiplexing and best efforts, which cannot meet the demand of full-stack servitization in 6G networks. Meanwhile, the new IP protocols will support the customization of data transmission requirements according to service requirements during user-plane data transmission in order to achieve deterministic services. The new IP protocol will evolve in the following three directions: first, a more flexible address space, which can be adapted to different types of addresses in different networks; second, the addition of service contract information in the data packet format, which may carry service types, latency requirements, packet loss probability requirements, etc.; third, the customization of data packet load, with data packet transmission requirements developed according to

the business requirements and the priorities and loaded into the contract information. Therefore, 6G OSS should be capable of data parsing and interaction according to the definition of packet format in the new IP protocol.

5.2.5 6G OSS Data Governance

The network data in 6G is more massive, polymorphic, sequential and correlated than that in 5G, and the native intelligence in 6G is based on automatic decision driven by data. Therefore, data governance technology has become one of the key technologies of 6G OSS to assure the data quality of 6G networks, and improve the efficiency of data management and the value of data application.

In the 5G era, 5G OSS mainly uses the network data platform/middle platform to realize centralized collection, unified processing and sharing of 5G network resources, warnings, performance, quality and other data. It also provides centralized and diversified data services to support requirements for applying the data, and provides AI and service control capabilities to support intelligent analysis and universal capability opening. Among them, for data governance in 5G networks, 5G OSS mainly guides the data governance activities through “nine steps”, i.e., data planning, standard definition, model design, data development, data collection, data creation, data usage, data archiving, and data destruction, and provides governance-related tools to carry out 5G network data governance.

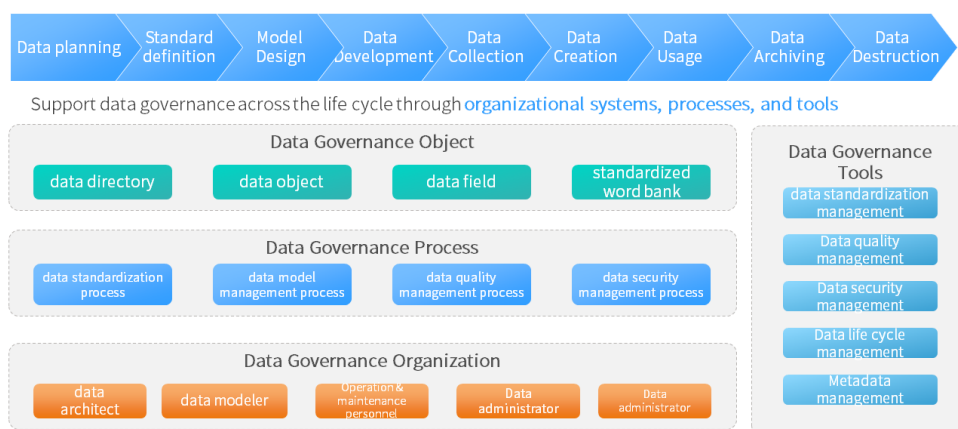


Figure 5-4 6G OSS Data Governance Process

Given that the network data in 6G is massive, polymorphic, sequential and correlated, 6G OSS needs to continuously carry out 6G network governance with the “nine steps” of data governance. As shown in *Figure 5-4*, the governance process mainly includes:

Developing Data Governance Standards

The standards for 6G network data governance should be developed to enable standardized and effective governance for 6G network data in terms of organization, process, tools, etc. On one hand, the scope of 6G OSS data governance will be expanded from network resources, warnings, performance, quality and other data in 5G to include the network computing resources and storage resources in 6G as well as the data generated by network functions (NF) with AI or analysis capability, such as NWDAF, PCF, etc. On the other hand, as the scope of 6G data governance changes, it is necessary to develop corresponding governance standards for the newly added computing resources, storage resources and real-time network analysis data, such as data classification and coding, data dictionaries, metadata standards, data exchange standards, and data quality standards.

Intelligent Data Governance

Analyze 6G data based on machine learning and natural language processing technology, rapidly organize high-frequency roots and automatically map data standards to metadata to establish a data standards management system; strengthen data governance capabilities through federated learning to improve the efficiency of data transaction and data circulation; automatically identify data quality through machine learning, perform effect evaluation and intelligent data quality repair, and make dynamic updates according to the changes in data volume and business phases; establish information collection, association and interaction between business departments and systems and multi-link business processes to improve the efficiency and accuracy of data elements circulation.

Based on the DIKW system, 6G OSS will, firstly, comprehensively sort out mobile communication network, computing resources, and storage resources and other data based on the 6G mobile communication principle and mobile communication protocol using knowledge graph-machine learning and other technologies. This will complete the

first step towards AI-oriented mobile communication data governance, that is, integrating expert knowledge and data into human understandable information and even knowledge rules using expert knowledge bases and data mining techniques. Secondly, it will build frameworks and models with logical inference relationships using the knowledge graph technology and perform knowledge mining and knowledge inference. Once the network data knowledge graph is built, the network, computing resources and storage resources can be fully monitored. Finally, as a closed-loop link, machine learning is mainly designed to build various types of feature datasets for different application scenarios.

5.2.6 6G OSS Hyperautomation

Hyperautomation is a service-driven technology mix composed of various technologies. The OSS of the communications industry mainly realizes network planning, construction, maintenance, optimization, operation, as well as network Fault Management, Performance Management, Resource Management and Configuration Management based mainly on Robotic Process Automation (RPA), Process Mining/Business Process Management (BPM) and LowCode/NoCode technologies.

Robotic Process Automation (RPA)

Robotic process automation technology is used to automate information-based systems. It provides data collection, data handling, data filling, process execution, AI enabling, and empowerment and process re-engineering services without invading existing systems, thus enabling automated and intelligent business processes to stimulate the business native vitality of the enterprises and support their “digital + intelligent” transformation.

In the 6G era, with the evolution of RPA technology, 6G OSS will fully automate 6G network planning, construction, maintenance, optimization and operation with RPA technology. In network planning, 6G OSS will realize automatic planning for site selection for the construction of wireless network base stations and the configuration parameters of base stations. In network construction, 6G OSS will automatically collect

and enter information of new 6G NEs. In network maintenance, 6G OSS will automatically inspect the network, verify various O&M data, and analyze network faults and quality. In network optimization, 6G OSS will automatically optimize wireless network configuration parameters and communication and sensing convergence parameters; and in network operation, 6G OSS will automatically verify operation data and shelve business solutions, etc.

Process Mining/Business Process Management (BPM)

Process mining, the bond between data science and process science, involves obtaining data and extracting knowledge from the event logs of modern information systems to discover, monitor and improve actual processes. BPM (Business Process Management) is a mix of technologies used to analyze the current state of processes, design “future processes” to solve problems, and deploy and monitor processes to improve them. Capabilities such as Process Discovery, provided by process mining technology, provide powerful support for BPM to enable process analysis, design, deployment and monitoring.

In the 6G era, with the evolution of Process Mining/Business Process Management (BPM) technology, 6G OSS will realize E2E automated discovery, design and management of related business processes in such fields as 6G network fault management, performance management, resource management and configuration management. In fault management, the fault warning and recovery process will be mined for design optimization of 6G OSS to realize E2E automation of the network fault process ranging from monitoring, warning to optimization/recovery. In network performance management, the network performance optimization process will be mined for design optimization of 6G OSS to realize E2E automation of the network performance optimization process. In network resource management, 6G OSS will realize E2E automation of the business management process of 6G NEs throughout their life cycle from net in, net on to net off. In network configuration management, 6G OSS will realize E2E automation of the business process of network configuration parameters from acquisition, optimization to activation.

LowCode/NoCode

LowCode is a technology used to rapidly design and develop software systems. It allows the user to create applications quickly in a visual designer by dragging and dropping, thus skipping the infrastructure and tedious technical details and getting straight to the development work that is closely related to the business requirements. NoCode technologies allow non-technical personnel to build and deploy their own applications without having to write any code.

In the 6G era, based on LowCode/NoCode technology, 6G OSS will enable users to quickly implement and deliver their business requirements. In terms of exposure and management, for users engaged in network maintenance, 6G OSS may help them with drag-and-drop development and configuration for O&M management needs related to network faults, performance, resources, configuration, etc. For government and enterprise users, based on LowCode technology, 6G OSS may help them develop new businesses quickly based on 6G networks. In terms of extension and integration, 6G OSS may extend the functionality of existing components with little or no code based on rapid visualization and drag-and-drop development, and build 6G OSS capabilities by integrating external capabilities. In terms of improving user experience, 6G OSS may provide users with flexible, fast and convenient 6G network and business management tools based on LowCode technology, which reduces users' learning costs and improves their experience. In terms of application ecology, 6G OSS is based on hyperautomation technology, which enables rapid secondary development and capability opening of 6G networks and 6G OSS applications to build 6G and 6G OSS-based application ecology.

5.2.7 6G OSS Application in ESG

6G is an important infrastructure to realize balanced and high-end social services, scientific and precise social governance, green and energy-efficient social development, while green and sustainability are also the goals and visions to be achieved by the 6G networks. 6G OSS supports the construction of 6G ESG system, and empowers 6G to develop sustainably and with high quality.

Sustainable Public Safety based on Space-Air-Ground Integrated Security

In the event of public safety incidents, such as natural disasters, epidemics and security emergencies, 6G OSS may rapidly reconfigure and recover network communications based on the sustainable public safety network guarantee and management capabilities before, during and after the incident, and enable dynamic scheduling of network resources. This helps 6G networks to take on more extensive public safety social responsibilities.

Based on real-time collection and analysis of dynamic network data such as space-air-ground joint networking, network communication, computing resources and storage resources and other multi-dimensional resources, and external security events and situational linkage, 6G OSS may dynamically sense and predict the network situation in real time through network full life cycle automation technology, and realize network situational awareness analysis and prediction and early warning. Based on network fault analysis and root cause location, 6G OSS enables rapid detection and location of the fault, and automatic recovery of the networks and even without interruption using automated and intelligent technology. For local area network faults caused by physical damage in security incidents, the 6G network in a specific area and range can be quickly restored based on distributed, service-based private network technology, or orchestrate and schedule other network resources through intelligent network by taking advantage of space-air-ground three-dimensional networking, thus realizing flexible networking and resource scheduling for real-time emergent recovery of communication capabilities.

Network simulation and “recovery from fault” drills are important measures taken to improve the resilience, self-protection and recovery capabilities of network in public safety emergencies. For all types of public safety incidents, 6G OSS may enable E2E network simulation (network fault occurrence, fault impact and recovery from fault) and recovery from fault drills based on technologies such as digital twin and native AI.

Natural Disaster Prevention and Control Based on Space-Air-Ground Integration and Joint Sensing and Communication

There are many types of natural disasters in the world which are widely distributed, occur frequently, and may cause heavy losses. The 6G networks feature space-air-ground integrated networking, and are also capable of joint sensing and communication. The space-air-ground integrated network with full coverage effectively supports the information sensing, data communication and service carrying capabilities of the disaster monitoring system, with increased disaster monitoring coverage, improved accuracy and timeliness, and more scientific and effective decision-making and command. The joint sensing and communication capability of the 6G itself can supplement and enhance the existing imaging capabilities based on visible light and infrared remote sensing, and provide disaster perception and identification capabilities, and identify key elements such as the scope of influence, development and damage caused by the disaster.

Green Computing Technology

Establish a support platform based on AI, big data and cloud computing to enable a highly energy-efficient intelligent computing system, including efficient execution of AI models on network-side and edge-side devices, efficient management of resources on the edge-side and efficient training of AI models on cloud servers; improve quality, increase efficiency, save energy and reduce emissions using AI, and build a data-driven and AI decision optimization algorithm-based engine. Build an intelligent green computing platform towards the “carbon peaking and carbon neutrality” goals with the green computing technology, and support upper-layer data-driven AI decision-making optimization algorithms (such as reinforcement learning, multi-agent collaboration) using the underlying, high-efficient, terminal-edge-cloud cooperative AI computing system, enable green 6G networks.

5.2.8 6G OSS Distributed Autonomous Cooperation based on Space-Air-Ground Integration and Joint Communications and Sensing

Distributed OSS Technology Incorporating Native AI

The 6G native AI capabilities of each NE in the future network architecture forming distributed nodes with AI capability within the network. The data, NE objects, and NE control capabilities required by each distributed AI node must be provided via corresponding distributed OSS capabilities. The distributed nodes with AI capability and the corresponding distributed OSS nodes serve the functional intelligibility controlled by the NE at where they are located. Sharing and transmission of AI models between distributed nodes, and scheduling of resources required for AI models and training can be managed through a small number of centralized OSS management nodes.

Distributed OSS Management Technology by Domain for New Technologies such as Space-Air-Ground Integration and Communication Awareness

To artificially control the wireless communication environment using ultra-large antennas and reconfigurable intelligent surface (RIS), the future network will have AI nodes distributed on the wireless side, responsible for providing intelligent computing and control capabilities. The intelligent selection of inter-satellite links within the satellite system is closely related to the constellation configuration of the satellite system and the satellite service area, and the inter-satellite links are concentrated in the satellite system and their intelligent empowerment will also be distributed in the satellite system (e.g. satellite payloads, satellite feeder stations). Given IoT communication intelligence, robot nodes in the future IoT will provide not only conventional communication and transmission capabilities, but also the capability to sense and recognize information such as sounds, smell and surrounding environment images, and integrate environmental sensing information into IoT intelligent communication decisions. Communication between intelligent robots supported by 6G networks and network self-configuration has clear requirements for territory and data transmission quality. In general, localized network intelligence and network management capabilities can better meet high flexible

communication and network management needs. Similarly, the sensor group used to sense wireless environment, the dynamic pairing of multiple transceiver antenna pairs and interference management in a de-cell environment can be better managed using distributed nodes with AI capability and distributed OSS nodes deployed near end.

Within the scope of distributed OSS management, the sensing capabilities based on joint sensing and communication, the native computing capabilities of local networks, and the native AI capabilities of NEs constitute the edges and terminals of 6G networks. Compared with the case in 5G, the edges and terminals in 6G have stronger network information collection capabilities, and the native computing resources may provide more capacity space for the edges and terminals, combined with the native AI capabilities of NEs and distributed OSS management capabilities, the edges and terminals in 6G will be more capable of meeting future services and user needs.

Multi-domain OSS Collaboration Technology for Cross-domain Fusion

Limited by the control scope of distributed OSS, a single distributed OSS manages a specific domain, e.g. intelligent sensing of the environment with multiple types of sensors, or a specific airspace, e.g. control of NEs in a specific plant and other scenarios. Therefore, the type of data, the amount of data information and AI training models within the control scope of a single distributed OSS are generally closely related to the characteristics of the object controlled by the distributed OSS. The distributed OSS has better local control capability over phenomena and behaviors that recur on a daily basis. However, in terms of responding to small-probability events such as change of environment, unexpected changes in businesses, and sudden abnormalities in NEs, the distributed OSS can directly process only a limited quantity of data and NE devices affected, making it difficult to meet the stringent requirements for reliability in future business scenarios. In addition, among the resources controlled by distributed OSS, the resources available for OSS control are relatively limited, making it unable to perform highly complex network autonomous tasks and tasks for unified management and coordination of network resources.

In response to the limitations of distributed OSS, the 6G centralized OSS nodes came into being. Centralized OSS nodes are not the only centralized nodes in the whole network. Centralized OSS nodes are located among multiple distributed OSS nodes and are directly responsible for the information and resources interaction between adjacent distributed OSS nodes. Centralized OSS nodes transfer aggregated information and resources exchanged by distributed OSS nodes.

5.2.9 6G OSS DTN

As a new network service, DTN service will provide E2E or partial network functions in 6G networks. It will accelerate mobile network innovation to reduce the R&D cost and shorten the R&D cycle in the telecommunications industry ^[43]. For the 6G network, a new automated network O&M system will be built through digital twinning, enabling the network to achieve a high “autonomous” level in its full life cycle ^[44]. Building a DTN based on the physical network, and optimizing physical network O&M in combination with DTNs are the key technologies of 6G OSS.

In DTN, various network management and applications may use the network virtual twins created by the digital twin technology to efficiently analyze, diagnose, simulate and control the physical networks based on data and models. The DTN provides a digital validation environment closer to the real-world network for network O&M optimization and policy adjustment, enabling pre-validation to be completed without affecting network operations, significantly reducing the trial-and-error cost. Through the deep integration with native AI, DTN can predict the development trends and problems of physical network. On this basis, DTN can generate pre-interventions for network optimization, and provide a digital validation environment closer to the real-world network for these network O&M optimizations, AI models and workflows, and intelligent decision-making, which ensures more accurate and reliable validation results.

6G OSS DTN technologies also include technologies for orchestrating and optimizing physical network ontologies and twins. According to the users’ business characteristics and the network O&M requirements, the required resources and functions are uniformly

orchestrated to form capabilities that ensure the user's business experience. 6G OSS may orchestrate and manage the physical network by interacting with the network twins and accepting the network configuration parameters output by the network twins, thus realizing automatic network operation, and improving the network adaptability to new services, new scenarios, and new differentiated demands.

5.2.10 6G OSS Native Network Security

6G OSS will support the space-air-ground integrated networking of 6G networks, management and orchestration of multiple types of NE devices, and the connection and scheduling of multiple forms of network resources. With the increasing complexity in network connections, network security perimeters are further blurred, and traditional "patch" security measures based on detecting, analyzing and protecting network traffic at perimeters fail to meet the needs of 6G OSS to protect against security risks. 6G OSS shall be designed based on the principle of "Security By Design" to guarantee the native trustworthiness of OSS and the services and decisions it provides. By providing process-based rather than perimeter-based security technologies, security risks can be prevented during distributed heterogeneous resource orchestration and scheduling, autonomous management and capability opening. In this way, 6G OSS will be able to handle security threats, and be protected with comprehensive and native security.

6G OSS Trust Fusion Technology for Heterogeneous Resources

6G OSS needs to ensure the credibility of E2E resource orchestration, build fusion trust between different network entities based on blockchain technology, realize distributed 6G OSS network resource scheduling and orchestration, ensure safety and controllability for the whole business process from signaling transmission, execution to feedback. By providing continuous self-adaptive risk and trust evaluation, risks are managed during resource orchestration and interaction, and the risk and trust levels are constantly monitored and evaluated. If any decline in trust or increase in risk to the threshold is detected, a response is required to timely adjust the connection and call policy for network resources.

6G OSS AI-based Native Network Security Capability Orchestration Technology

6G OSS shall provide a security capability resource pool that can be called, and collaboratively generate security policies based on diverse local environments of distributed 6G OSS and centralized OSS. 6G OSS shall form flexible on-demand services with other network facilities or services through intelligent orchestration, providing AI-based, intelligently generated proactive security protection policies that can adapt to network changes synchronously or even prospectively to complete security resource orchestration, so as to derive an inherently robust defense for the network, flexibly deploy security capabilities, and enhance the network resilience. In addition, the native network security technology of 6G OSS shall have less computing overhead and energy overhead to meet the low power consumption and green requirements of the network.

6G OSS Ubiquitous Cooperative Security Situational Awareness Technology

6G OSS supports intelligent collaboration at the terminal, edge, network, and cloud sides for situational awareness based on federated learning and privacy computing through technologies such as big data analysis, anomaly detection, situational awareness, and machine learning. This allows it to accurately perceive the security situation of the entire network, and then handle the security risks promptly. 6G OSS may provide real-time risk analysis based on AI and big data to timely provide warnings and respond to security risks such as eavesdropping, interference, node counterfeiting, forgery, tampering, and data leakage. It supports the integration of security and network management based on security requirements around resources and different levels of business, enabling an automatic closed-loop from risk warning to security linkage response.

5.2.11 6G OSS Management for Computing Native Network

To solve the problem of low efficiency and high cost of computing power supply in digital transformation, the computing native network breaks through the physical boundaries between traditional network services and computing services, and adopts the intelligent scheduling and decision-making mechanism of communication and

computation on the basis of communication NE functions, enabling flexible access and on-demand use of new computing services. The overall architecture of computing native network/private network is mainly composed of three parts: computing native base station, which provides wireless access capabilities to communication networks and provides computing services for edge applications and network AI; computing native MEC, which realizes network edge computing functions and provides joint communication and computing resource scheduling and orchestration functions, and computing native core network NEs, which realize lightweight core network functions, and support capability opening and communication and computing cooperative scheduling [45].

The management technology of computing native network for 6G OSS can be studied from three aspects: dynamic decision-making of communication and computing NEs, lossless migration of network applications, and cloud-network computing resources collaboration.

Dynamic Decision-making of Communication and Computing Resources

6G OSS, as the communication and computing scheduling and orchestration decision maker of the computing native network, deploys edge applications in the computing native network/private network, and supports lossless migration of edge computing applications and computing resources balancing. When the network traffic load is low, the communication and computing scheduling and orchestration decision maker will manage the spare computing resources as dynamic computing nodes and provide them to edge applications, thus avoiding waste of the resources, and improving the utilization rate of wireless network equipment. On the contrary, when the communication network is busy and the computing resources of the communication and computing NEs are in short supply, the OSS will shrink and migrate the applications to fixed computing nodes or idle computing nodes to support the resource-strapped wireless business, in this way, the wireless computing resources can be managed dynamically. Meanwhile, by collecting and analyzing the native computing resources of the entire network in real time, 6G OSS will use the network-level native computing resources scheduling

algorithms based on federated learning to balance the utilization rate of computing resources in the native MEC computing resource pools across the network.

Lossless Migration of Network Applications

6G OSS will provide network application scheduling and migration service management capabilities. After decomposing edge network applications on the MEC into minimum capability sets and extended capability sets, the minimum capability sets will be firstly deployed on fixed computing nodes, and then, the extended capability sets will be flexibly extended to dynamic computing nodes. If the wireless computing resources are in short supply, only the extended capability sets can be migrated. In this way, edge applications can be migrated at minimum loss, and the utilization rate of wireless resources can be effectively improved.

Cloud-Network Computing Resources Collaboration

6G OSS will also feature collaboration of the cloud computing resources and the network native computing resources, allowing to orchestrate cloud-network computing resources according to the types of computing services and the application scenarios of services. This will meet the computing needs of customers both on and off the network, and enable deep integration of cloud and network computing resources.

5.2.12 6G OSS Native Intelligence

6G OSS shall support E2E network services and resource orchestration, management and scheduling based on native AI. With a unified AI signaling framework, it supports 6G distributed network architecture and collaboration with NEs with native AI, supports information interaction between AI services and various types of network resource services, and enables seamless integration of AI capabilities and other network services. 6G OSS also provides unified AI-based full life cycle management and enables integrated orchestration of distributed network AI native and network functions.

Component-based Dynamic AI Capability Orchestration

6G OSS needs to be geared towards E2E cloud native networks, and provides various AI capabilities and tools in a service-based manner, including dynamic discovery,

aggregation, integration and orchestration of AI services. Component-based management and orchestration of AI capabilities shall be provided based on intent analysis and dynamic mapping. By defining both general and diversified AI services, 6G OSS supports the integration of multi-type network resources and AI service, joint allocation and orchestration of resources, and flexible decoupling or combining of AI and network resource services. 6G OSS will collaborate with different network nodes to jointly provide the AI training/execution., Then, based on locally collected datasets, it can generate AI service orchestration models that fit the local situations through a large number of associated devices.

Distributed Native AI Cooperative Management and Scheduling Technology

6G OSS will provide distributed, cross-domain AI capability coordinated and cooperative management scheduling. By providing full life cycle workflow of AI models, 6G OSS supports scheduling of network-wide AI capabilities to meet specific service needs. This allows AI capabilities to be reasonably distributed across the network. 6G OSS will support AI-based, distributed multi-level network resource orchestration, establish a generation, training and inference framework for distributed real-time cooperative model, and enable integrated orchestration of heterogeneous resources such as multi-dimensional networks, storage and computing. The AI capabilities of 6G OSS will also be presented as a combination of distributed AI capabilities and centralized AI capabilities. Therefore, communication, resource allocation, and orchestration between AI services deployed in different network locations shall be supported. By providing local or global interpretable methods or interfaces of AI models, it will enable mechanisms and interfaces for importing and reusing AI models, provide a distributed model training framework, and support context-based automatic parameter adjustment.

AI Model Simulation Verification Based on Digital Twin

6G OSS shall provide a simulation environment to generate test data and test scenarios with the support of digital twin technologies. It will provide a unified interface for importing AI model verification indicators and test cases, the closed-loop optimization from model verification feedback to the entire AI workflow, and an external interface for

formal verification of models. Monitoring technologies for data and models shall be established to ensure that the multi-dimensional risks of AI models and services can be captured, and the effects for applying model inference results can be predicted. In the end, a continuous online update mechanism for models, and related interfaces shall be provided.

AI Signaling Interaction System

AI capabilities distributed in different parts of the network need to interact and collaborate with each other through a standard AI signaling system in 6G OSS. AI signaling interaction process, including information interaction among AI NEs during demand initiation, cooperative computing during model implementation. It needs to take authentication as the beginning-point take resource services as the foundation to finally enable 6G networks with AI flexibly.

Multi-dimensional Native AI Assessment and Evaluation System

6G OSS needs to manage OSS native AI services based on a unified assessment and evaluation system for AI services. To build a model evaluation system that integrates performance and efficiency based on dynamic optimization of environment context, the evaluation dimensions shall cover various aspects such as design, modeling, complexity, performance and energy efficiency, call frequency and service feedback of AI models and services. A model measurement mechanism for environmental similarity is needed to support transfer learning, federated learning for the robustness, security, prediction or recognition accuracy of AI models. For distributed native AI capabilities, it is necessary to propose scenario-specific AI model synchronization evaluation indicators, such as transmission requirements, AI performance requirements, etc. A list of key questions or risks for AI ethics, bias, and risk control, as well as a list of key questions or risks for identifying major losses caused by AI model's failure to make the correct decision or wrong decisions must be provided.

5.3 Summary of 6G OSS Technology Framework

Based on studies on the above 12 potential key technologies, the technology framework of 6G OSS is constructed from two aspects: native support capability and network management capability of OSS, as shown in *Figure 5-5*.

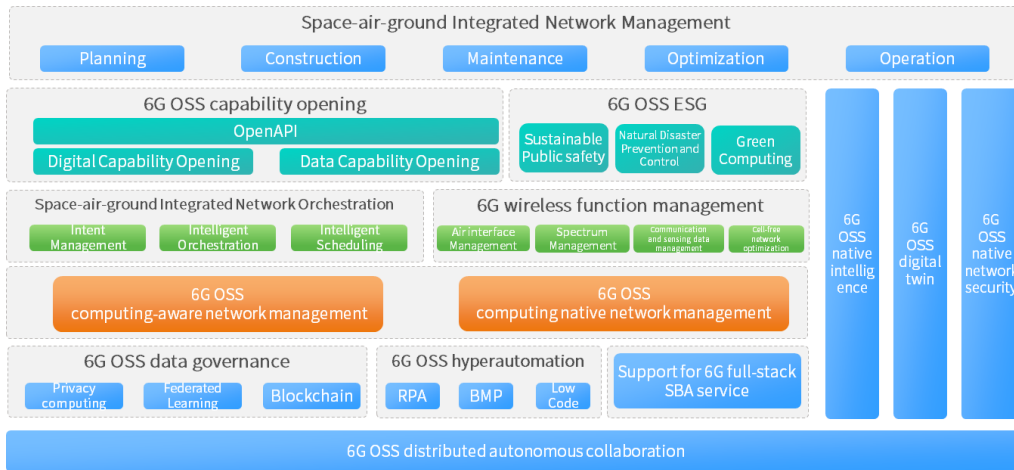


Figure 5-5 6G OSS Technical Framework

VI. 6G OSS Architecture and Functions

6.1 6G OSS Functional Architecture

To meet the needs of key business scenarios of 6G and network technology evolution, the functional architecture of 6G OSS (as shown in *Figure 6-1*) is mainly composed of 6G OSS core function, three general capabilities and three management functions.

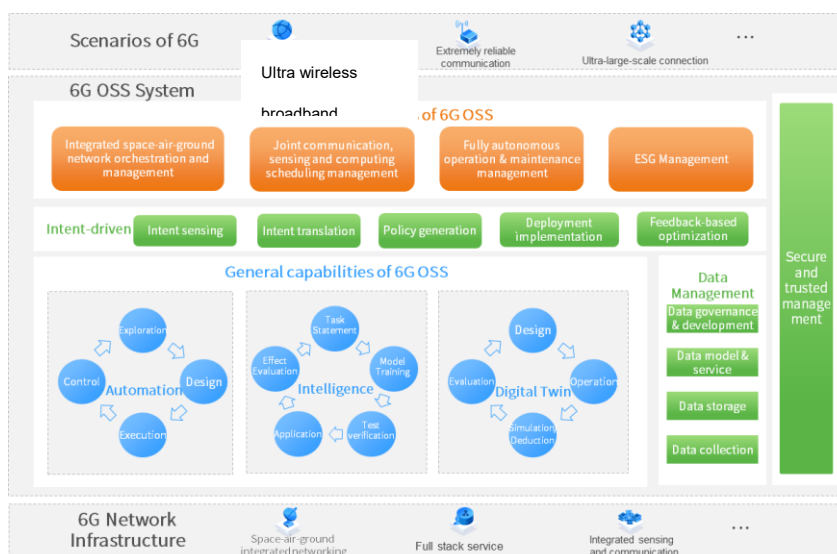


Figure 6-1 6G OSS Functional Architecture

The core function of 6G OSS: responsible for the network management business functions in the full life cycle of network from planning, construction, optimization, maintenance to operation, including space-air-ground integrated orchestration and management, joint communication, sensing and computing scheduling management, fully autonomous operations management and ESG management, etc.;

Intent-driven function: responsible for connecting the business intent and core capability closed loops generated by OSS business functions, including intent sensing, intent translation, policy generation, deployment and implementation and feedback-based optimization;

Automation capability: responsible for the execution of network management capabilities, empowering automated 6G OSS functions through the automation closed loop of exploration, design, execution and control.

Intelligence capability: responsible for providing the management capabilities required to run the full life application of network native AI model, empowering intelligent 6G OSS functions through a closed loop consisting of five AI development & application steps: task statement, model training, test verification, network application and effect evaluation.

Digital twin capability: responsible for the network twinning of OSS, enabling full life cycle analysis, diagnostic simulation and control based on twinned networks by building a digital twin for the physical network, and making the network highly autonomous and fully intelligent through predictive O&M.

Data management function: responsible for the collection, storage, computing, governance, modeling and serving of related resources (such as transmission capability, computing capability and storage capability of 6G networks) and related data (such as warning, performance and quality).

Security and trust management function: responsible for the management of OSS security and trust domains, ensuring the whole process of OSS to be secure and trustworthy through trust management, access right management, security policy management, security situational awareness and resilient disaster recovery management.

6.2 6G OSS Function Description

6.2.1 6G OSS Core Functions

The core functions of 6G OSS aim to meet the operator's 6G network operation and management needs. In addition to the typical 5G OSS capabilities such as network resource management, fault monitoring, network performance and quality management, and service scheduling, 6G OSS must upgrade its core capabilities for 6G business

scenarios and needs. Specifically, based on intent management and the three closed loops (automation, intelligence and digital twin), 6G OSS will provide O&M capabilities for the full life cycle (planning, construction, optimization, maintenance, and operation) of 6G space-air-ground integrated network, and support all business scenarios in 6G. 6G OSS is recommended to have the following potential business functions: Integrated space-air-ground network orchestration and management, joint communication, sensing and computing scheduling management, fully autonomous operations management and ESG management, etc.

Integrated space-air-ground network orchestration and management enables network service orchestration, integrated space-air-ground network orchestration and flexible orchestration of communication, sensing and computing resources. For network service orchestration, considering the business requirements, and driven by intent network, various network functions and service units are organized and connected in an orderly manner by network abstract language. This helps to form a network function set that can be automatically deployed to provide network service capabilities that can be dynamically adjusted, reused and quickly innovated. The space-air-ground network convergence, orchestration and management is used to collaboratively organize and connect network functions, network nodes, network resources, network topology and network spectrum among various domain networks. This provides highly reliable, flexible and scalable network service capabilities based on automation and twin closed-loops, and can meet the needs of dynamic and diverse space-air-ground service scenarios. Flexible orchestration of communication, sensing and computing resources is used to schedule and manage communication, sensing, computing and other resources. On the premise of meeting the business SLA, and based on factors such as performance, resources, economy, greenness, and security, it enables flexible and optimal orchestration of communication, sensing and computing resources through an intelligence closed loop, ensuring optimal combination of user business SLA and resources. The integrated space-air-ground network orchestration and management is northbound to dock the business requirements and southbound to dock the joint

communication, sensing and computing scheduling management, and provide orchestration and scheduling solutions for them.

Joint communication, sensing and computing scheduling management undertakes the scheduling requirements of integrated space-air-ground network orchestration and management, and is the execution center for resource scheduling management based on scheduling solution. Automated scheduling of communication, sensing and computing resources of 6G network infrastructure based on automation closed loop includes topology management, monitoring management, policy management, configuration management, performance management, quality management and data management of communication, sensing and computing resource nodes. At the same time, the joint communication, sensing and computing scheduling management provides distributed, decentralized and autonomous networking capabilities, enabling dynamic sharing and three-dimensional deployment of resources and supporting a distributed and autonomous 6G network architecture. The joint communication, sensing and computing scheduling management is northbound to dock integrated space-air-ground network orchestration and management, and southbound to dock the new 6G professional management units of communication, sensing and computing, such as new wireless network management, new core network management and new transmission network management.

Fully autonomous operations management provides 6G E2E automated, intelligent and twinned network O&M capabilities during the full life cycle from planning, construction, optimization, maintenance to operation. At present, the L5 automation and intelligence goal of autonomous network will be the basic capabilities and the first stage of 6G fully autonomous operations management. Based on this, 6G fully autonomous operations management will further expand the connotation and extension of autonomous network, enabling automated, intelligent and twinned O&M management for the entire domain of communication, sensing and computing resources, trans-space-air-ground integrated network sub-domains and B/O/M (business, O&M, management). The resource management, network fault management, performance management, quality management and O&M management and other capabilities of the existing 5G OSS will

be incorporated into the 6G fully autonomous operations management, constituting a part of its integrated closed-loop management. The fully autonomous operations management of 6G OSS is based on comprehensive management of communication, sensing and computing resources and cross-network sub-domain and B/O/M multi-domain convergence data sharing. Through native AI and DTN, it automatically realizes multi-service, multi-domain, full life cycle, and full-scenario closed-loop O&M management, meeting the goals and visions of 6G network autonomous (AI4NET) and network inclusive intelligence (NET4AI).

ESG management is the core capability to enable sustainable and high-quality development of 6G. It is also the key support capability for 6G to meet the goals and visions for balanced and high-end social services, scientific and precise social governance, and green and energy-saving social development. ESG management provides sustainable public safety network guarantee and management capabilities based on the space-air-ground integrated network. It provides global coverage and perception-enhanced natural disaster prevention and control capabilities based on space-air-ground integrated networking and joint sensing and communication. Combined with digital twin, it may enable public safety, early warning of disasters such as natural disasters, disaster simulation deduction and post-disaster recovery. ESG management is based on high-efficiency green computing technology to reduce the energy consumption of the 6G system itself, create a green digital infrastructure, and further support a green and inclusive digital innovation business ecosystem, helping to realize the “carbon peaking and carbon neutrality” goals.

6.2.2 Intent-driven Function

The intent-driven functions of 6G OSS include intent sensing, intent translation, policy generation, deployment and implementation, closed-loop optimization and other functions.

- **Intent sensing:** provides the ability to fully perceive business intents. Oriented towards the future 6G space-air-ground integrated network and joint sensing

and communication network, immersive holographic communication business requirements and diversified interactions, the intent input nodes and methods will be in a distributed, diversified and three-dimensional manner. It supports automatic collection of intents through various interactive methods (such as instructions, text, voice, motion, and touch) and different protocol messages. Based on natural language processing, semantic analysis and structured output of network intents, it helps 6G OSS evolve from network node connection-oriented provisioning O&M to multi-dimensional resource matching-oriented convergence and collaboration.

- **Intent translation:** parses and converts network intents into network capabilities. Based on business scenarios, it combines AI, network telemetry and other technologies to parse and convert network intents into network capability requirements such as resources, performance, and paths. Base on this, it integrates network domain knowledge based on knowledge graph technology, automates network demand prediction, matches network capability intelligently, converts network capability requirements into a machine-readable language that can be configured and executed, and ensures that intents are complete and de-obfuscated during parsing and translation.
- **Policy generation:** provides policy generation capabilities such as network provisioning and networking solutions according to the requirements for network capabilities. It provides intent-driven, programmable and scalable E2E dynamic networking policies and scheduling solutions, enabling flexible service customization, intelligent network management and O&M. Combined with network resource efficiency and capability distribution, it dynamically generates policies that match user intent and network intent. Based on machine learning and reinforcement learning, it can provide flexible, dynamic optimization policies to meet the needs of dynamic scenarios and evolutionary trends.
- **Deployment and implementation:** provides networking scheme and dynamic orchestration and scheduling capabilities, mainly including intent verification, intent conflict resolution, network resource orchestration and configuration. Intent verification provides a virtual verification environment based on digital twin technology to verify whether the intent-based network policies are executed as expected and may achieve the desired results. Intent conflict

resolution can dynamically identify intent conflicts and automatically generates coordination policies. The network resource orchestration and configuration is based on intelligent policy matching, cross-domain intent weaving technology and digital twin technology, enabling a closed-loop implementation without human intervention from automatic policy issuance, operational monitoring and feedback.

- **Feedback-based optimization:** provides network performance awareness and demand capability matching monitoring and optimization capabilities. It is based on configuration, monitoring, analysis, management, evaluation and optimization and is designed to improve the operational efficiency of the intent-driven network throughout the full life cycle and efficiency of resource usage to ensure that business intent is achieved as expected. Based on multi-objective optimization technology and dynamic optimization policy, it can precipitate policy templates for typical scenarios, fully enhance the autonomous flexibility of the network's native AI and gives full feedback on the intent network and optimize it.

6.2.3 Automation Capability

As shown in *Figure 6-2*, the automation closed loop, as one of the general capability closed loops of 6G OSS, is mainly based on comprehensive 6G data management. Through E2E exploration, design, execution and control management of tasks and processes related to 6G OSS business functions, it empowers 6G OSS business functions and automates tasks and processes.

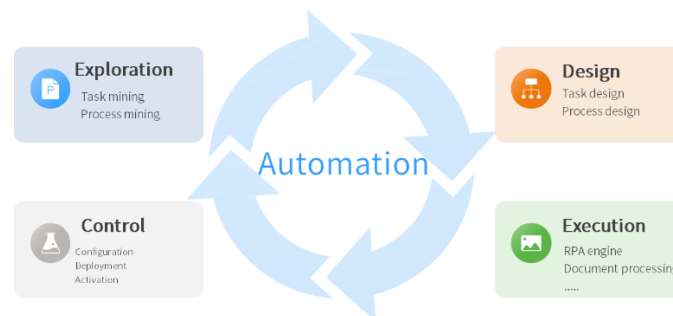


Figure 6-2 Automation Capability

Compared with the four-link closed loop (sensing, analysis, decision-making and execution) of autonomous network, 6G OSS is based on hyperautomation technology,

by combining with RPA, process mining and LowCode/NoCode technologies, it gives specific methods and means for automating the tasks and processes of 6G OSS business functions, and may help 6G OSS operators to automate their business functions quickly and effectively.

- **Exploration:** 6G OSS enables task mining and process mining in 6G OSS business functions based on its hyper-automated Process Mining/Business Process Management (BPM) technology and other technologies. Task mining is used to automatically identify and aggregate operation records related to 6G OSS business functions and identify steps with a high potential for automation, such as mining business provisioning operations in the integrated space-air-ground network orchestration and management function to automate operations such as resource survey, pre-occupation and configuration during service provisioning. Process mining is mainly used for process reduction using digital footprints left in 6G OSS business applications (such as space-air-ground integrated network orchestration and management, cooperative scheduling management and fully autonomous operations management) to automatically identify process pain points and bottlenecks, and improve and optimize them through design and other steps in the automation closed-loop.
- **Design:** Based on the hyper-automated LowCode and NoCode technologies, 6G OSS may design automated processes quickly using a simple drag-and-drop editor. Workflows for 6G OSS business functions, e.g. space-air-ground integrated network orchestration and intelligent O&M workflows, together with tasks, can be designed and constructed by simply recording the workflows through screen recording, without manual programming.
- **Execution:** Based on the hyper-automated RPA and other technologies, 6G OSS may enable automated operation and execution of 6G OSS workflows and tasks completed in the design link. The robot engines support the following forms: manned, unattended and high-density robots, which may enable efficient and stable operation of the main functional flows of 6G OSS, such as the automatic execution of the space-air-ground integrated network orchestration resource exploration flow. In addition, through the intelligent document processing function, 6G OSS performs the automatic identification, classification, element extraction, verification, comparison, and error correction of unstructured data

(such as tables, documents, images, and audio/video) using pre-trained AI algorithm models, for example, automatic inspection of computer rooms or networks in fully autonomous operations management, which can automatically identify images of equipment and cabinets, timely detect abnormalities and perform subsequent autonomous network O&M.

- **Control:** It provides the capabilities required to configure, deploy, start, monitor, measure and track the automation workflows or tasks of 6G OSS, so as to ensure the secure and efficient execution of all automated processes and tasks.

For task decomposition with regard to 6G OSS workflow design, it is recommended to follow the following three principles with reference to TMF:

- **Integrity:** All O&M actions must be decomposed into the five steps mentioned above.
- **Balance:** The size and granularity of each task must be basically the same.
- **Non-overlapping:** Each task needs to be atomic in size, and the functions it carries do not overlap with each other.

6.2.4 Intelligence Capability

As one of the general capabilities of 6G OSS, the intelligence capability closed-loop mainly provides the required management capability for the whole-life application operation of native AI models in 6G networks. It enables the intelligentization of functions of 6G OSS through the closed loop of five AI development and application steps: task statement, model training, test verification, network application and effect evaluation. *Figure 6-3* shows the workflow of intelligence capability closed-loop.

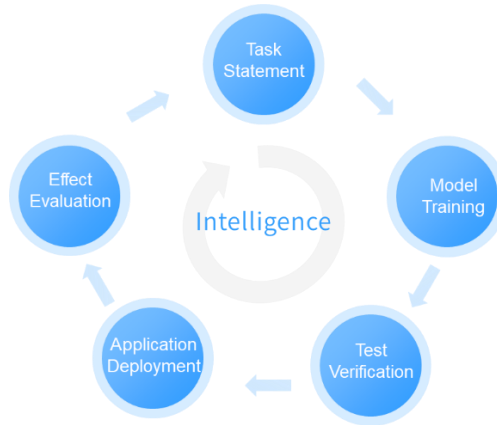


Figure 6-3 Intelligence Capability

- **Task statement:** The network AI task statement is the initial step of the full life cycle of native AI. 6G OSS can obtain the network service intent through interacting with the intent management package, and generate the description of AI tasks based on the service intent, including task objectives, task scenarios, and AI model types required for tasks.
- **Model training:** The OSS, based on the description of network AI scenarios, chooses to call the corresponding algorithm and apply the training data in the corresponding scenario data for model training, and generates AI models.
- **Test verification:** The AI models are subjected to test verification by using test data in the application scenario data of OSS. For unsupervised models and other models that cannot be tested by data, they can be verified by service logic-based setting rules.
- **Application deployment:** For the models that have passed the test verification, OSS needs to be responsible for the application connection between AI models and related network functions, and realizes the automatic call of network functions to the models by defining the format of input/output data and parameter configuration of AI models.
- **Effect evaluation:** For AI models that have been deployed and applied in the network, OSS needs to monitor the effects of the models on a periodic or event basis, evaluate whether the operational effects of the AI models meet the scenario design requirements, and determine whether model optimization is required.

6.2.5 Digital Twin Capability

The DTN consists of virtual twins, and provides various simulated operation environment for physical networks. After the simulation scenario is orchestrated through the simulation task, the appropriate NEs and models are selected according to the needs, the digital twins are triggered to the running states through the instantiation of the simulation tasks, then obtaining the simulation results. The digital twin is composed of appearance models, several function models and performance models. If the digital twin enters the running state, it means that the function models and performance models are instantiated. Network topology is the frame for holographic visualization of the DTN which is generated based on the collected configuration data, and presented by superimposing the real-time data synchronized from physical networks based on the network topology, finally making the physical networks visible and manageable. The digital twin capability closed loop consists of the following steps: design, operation, simulation/deduction, and evaluation, as shown in *Figure 6-4*.

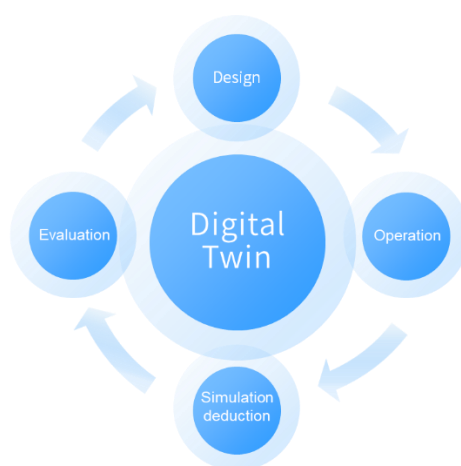


Figure 6-4 Digital Twin Capability

DTN design

The DTN design includes digital twin monolithic modeling and digital twin application scenario modeling. The design phase is also known as the design state of the DTN. The twin design definition of physical entity monolithic and application scenario is mainly completed in this phase. Monolithic modeling realizes the entity representation based on

ontology theory. Firstly, it defines the elements of ontology, such as classes, attributes, relationships, rules and instances, and then represents the consistency of large-scale network data through ontology models. Oriented to communication network devices and logical NEs, monolithic models (including physical spatial models, mechanism models and semantic models) of the wireless network digital twin are established based on the information about physical devices, environment, topology nodes, network links, container & virtual machine and NE configuration, The digital space and physical entities, and ultimately, accurately modeling the real-world network in real time are linked. In the full life cycle of “planning, construction, O&M and optimization”, it provides basic capability support for simulation, visualization and intelligent O&M capabilities of the digital twin.

Digital twin application scenario modeling includes data model modeling and network capability modeling. Based on network operation data and all kinds of indicators, data model modeling enables intelligent construction of various characteristic models of the network, network capability modeling enables high-fidelity simulation of digital twins, and supports verification and testing of service rules in scenario construction.

Operation of DTN

The operation of DTN refers to the process of obtaining the performance of a communication network by simulation of data models and network capability models for digital twin based on the models and scenarios obtained from the DTN design and based on all dynamically changed data of the input twin models over time and space. The DTN in operation is usually called the operation state of the DTN, when the DTN synchronizes the operation of the physical network in real time. In the operation state of DTN, the input data can be historical data of network operation, network data based on network deduction or prediction, or a combination of historical data and prediction-based data according to specific application scenarios. The results output from operation are the output indexes for twins of the DTN set based on the DTN scenarios.

Simulation and Deduction of DTN

The simulation and deduction process of the DTN is also called simulation state of the DTN. Based on the time slice of a certain running state, the simulation state of the DTN forms multiple physical images for simulation and deduction. This can be realized either by network performance simulation method which simulates NE attributes and network communication protocols, or by AI-based network performance simulation method. The former deduces the performance of the network under certain network input data by computer simulation of the rules of the network communication protocol, which is used in the traditional network performance simulation of mobile communication. The simulation accuracy is directly affected by the sophistication of network communication protocol modeling. Thus, to gain high accuracy of simulation, a large amount of manpower and material resources are required in terms of computing and codes update caused by the update of communication protocol standards. In response to the lack of network performance simulation based on network communication protocols, AI-based network performance simulation method has emerged. This method takes network input data and network performance metrics as input and output of the model respectively, and generates AI models of network behavior with AI algorithm. The network performance metrics are deduced by substituting network data into the trained network model, thus reducing the labor consumption of writing accurate communication network protocol codes. To further improve the accuracy of AI-based network performance simulation results, the rule model of communication protocols can be substituted to form a knowledge graph, reducing the amount of data and computing required for AI model design and training.

DTN Evaluation

DTN evaluation is a process of comparing and analyzing the performance results of DTN under different input data conditions. The evaluation methods can be based on evaluation rules formed by collecting a large quantity of expert experience, AI models obtained by network simulation, or a combination thereof. In large-scale networks, the AI model

trained based on expert experience can not only effectively reduce the labor input in network O&M, but also maintain good network autonomous performance.

6.2.6 Data Management Function

The data management function of 6G OSS mainly realizes the acquisition, storage, computing, governance, modeling and service of such data as the related resources (such as transmission capability, computing capability and storage capability of 6G network), warning, performance and quality, improves the efficiency of 6G data research and development, reduces the data management cost and empowers the circulation of 6G data values.

The data management function of 6G OSS mainly covers the data collection & access layer, data storage & computing layer, data management layer and data model & service layer, as shown in *Figure 6-5*.

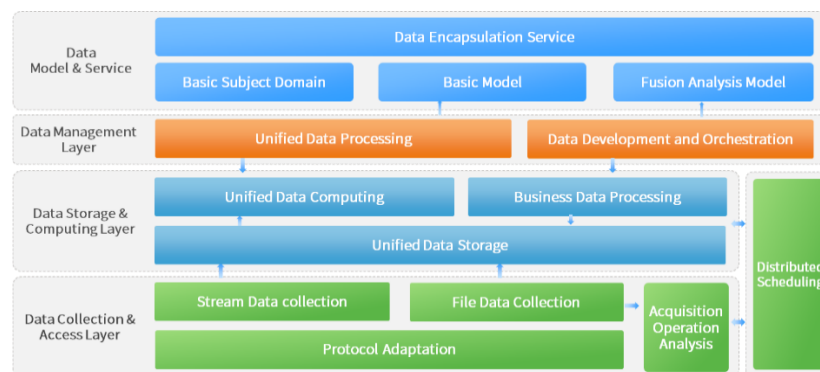


Figure 6-5 6G OSS Data Management

- **Data collection & access layer:** It realizes the collection of data about 6G network, computing, storage-related resources, warning, performance and quality, and real-time analysis data of network functions such as NWDAF. The data collection & access layer mainly includes protocol adaptation, stream data collection, file data collection and acquisition operation analysis, among which, protocol adaptation (such as Restful and SNMP) is mainly designed to realize the unified protocol adaptation and management of 6G multidimensional data collection; stream data collection is mainly designed to realize the acquisition of real-time stream data in 6G networks; file data collection is mainly designed to realize file data decompression, file splitting and merging, format conversion,

data re-collection policy and quality inspection for data collected. At the same time, the acquisition operation analysis function can realize data volume analysis of acquisition data service and state analysis of acquisition interface machine/acquisition cluster, and guarantee the data collection quality of 6G OSS.

- **Data storage & computing layer:** It realizes the storage and data processing of multidimensional data about 6G networks, computing and storage. Unified data storage mainly includes distributed file storage, distributed K-V storage, distributed data warehouse, main memory database, distributed relational database and distributed multi-dimensional index database. Unified data computing is mainly designed to realize batch computing and real-time computing of data. Service data processing is designed to realize the data cleaning and conversion, associated backfill and multidimensional analysis, as well as mining and prediction. At the same time, the functions of data collection layer and storage & computing layer can provide data collection and storage & computing capabilities via the unified distributed scheduling function module.
- **Data management layer:** It is mainly designed to realize unified data governance, data development and orchestration of 6G multidimensional data, among which, the unified data governance, based on machine learning and natural language processing technology, realizes intelligent metadata management, quickly sorts out high-frequency roots and automatically maps data standards with metadata, and establishes a data standard management system. It improves the data governance capability through federated learning and realizes the efficient data circulation management. It automatically identifies data quality through machine learning, evaluates the effect of data quality and intelligently repairs the data quality, thus improving the data management capability. Data development and orchestration realize the development of data model and data or the orchestration of application process, and empower the upper data model & service layer.
- **Data model & service layer:** It mainly realizes the management of basic master data field model, basic model and convergence analysis model of 6G network data based on data management tier, and provides data encapsulation services. The basic master data field management mainly involves the master data fields of 6G networks, computing and storage data, such as the resource domain (such

as network resources, computing resources, storage resources and service resources), quality analysis domain (such as performance indicators for operation of various resources and services), event domain (such as warning and performance anomaly), configuration domain (such as network configurations and device parameters), O&M domain (such as work orders, logs and operations) and knowledge domain (such as expert knowledge, schemes and rules). Basic model management mainly involves the data models of 6G networks, such as resource model, performance model, wireless network optimization model, detailed list data model, joint sensing and communication data model, enterprise and home network customer model and fault model. Convergence analysis model management mainly involves the convergence quality analysis model, resource analysis model and service awareness analysis model in terms of 6G network. At the same time, it combines and encapsulates various data model capabilities through data encapsulation services, and provides external data services, such as real-time query, multi-dimensional performance analysis, quality insight, and data subscription services.

6.2.7 Security and Trust Management Function

The security and trust management of 6G OSS includes trust management, access authority management, security policy management, security situation awareness and flexible disaster recovery management.

- **Trust management:** It mainly includes authentication, password management, privacy management, trusted authentication and other functions. To meet the business requirements related to the planning, construction, maintenance, optimization and operation of 6G networks, the trust management of heterogeneous nodes, resources, capabilities and services in distributed networks, as well as the full life cycle of services (access, management, call and exposure) are provided based on blockchain, privacy computing, federated learning and other technologies, thus ensuring the security of the whole service flows of OSS orchestration & scheduling, signaling transmission and execution feedback, and reducing the risk of privacy leakage.
- **Access authority management:** It mainly includes authority management, access control and other functions. The authority management can realize the data authority, operation authority and page authority of accounts configured in

an automatic and flexible way by 6G OSS based on service scenarios, user roles and behaviors. Access control mainly realizes the access management of multi-dimensional resources and data, supports multi-dimensional combination management based on identity, behavior, attributes, roles and rules, realizing dynamic fine-grained access control and guaranteeing minimum authorized accessing.

- **Security policy management:** It mainly includes risk assessment, security audit, compliance analysis, policy optimization and other functions. It is designed to meet business requirements, resource status, network optimization requirements and security assurance requirements. It automatically generates dynamic security policies through continuous adaptive assessment analysis, providing managers with decision support for security risk assessment and emergency response, and guaranteeing the confidentiality, integrity and availability of 6G OSS information security.
- **Security situation awareness:** It mainly includes situation awareness, risk identification, monitoring & early warning, response & disposal and other functions. Based on network monitoring data and service analysis data, it provides the visual interactive display of multi-dimensional communication, computing and sensing resources (supported by digital twin technology) and the security situation of the space-air-ground joint network. Based on AI algorithm and anomaly detection model, it automatically identifies security risks and holes, and realizes intelligent closed-loop disposal of security situation awareness, risk scanning and emergency response of network O&M.
- **Flexible disaster recovery management:** It mainly includes cloud-based native disaster recovery backup, flexible expansion and other functions. 6G OSS provides active security protection meeting the needs of evolving towards network cloudification, virtualization and servitization, improves the responsiveness of network fault management, guarantees flexible response to emergencies, disasters and attacks, and ensures the availability, reliability and continuity of networks and services.

6.3 Typical Cases of 6G OSS

Case 1 Joint Optimization of 6G Communication, Sensing and Computing Performances

A 6G network is an information system integrating communication, sensing and computing, with its business carried on a converged and unified 6G hardware platform. Therefore, the communication resources, computing resources and sensing resources need to be jointly optimized for the 6G network management system, so as to meet the SLA requirements of users and achieve the optimal network operational efficiency. Taking the industrial vision inspection service in the smart factory as an example, the 6G network transmits the images collected by the terminal and detects product defects through native computing capability. To meet the SLA requirements of convergence of communication and computing in this case, 6G OSS derives the service transmission & computing model and base station resource consumption trend by calling the intent control function provided by the fully autonomous operations management module, comprehensively applies the automation, intelligence and digital twin capabilities of 6G OSS to realize and implement the optimal scheduling scheme for communication and computing resources.

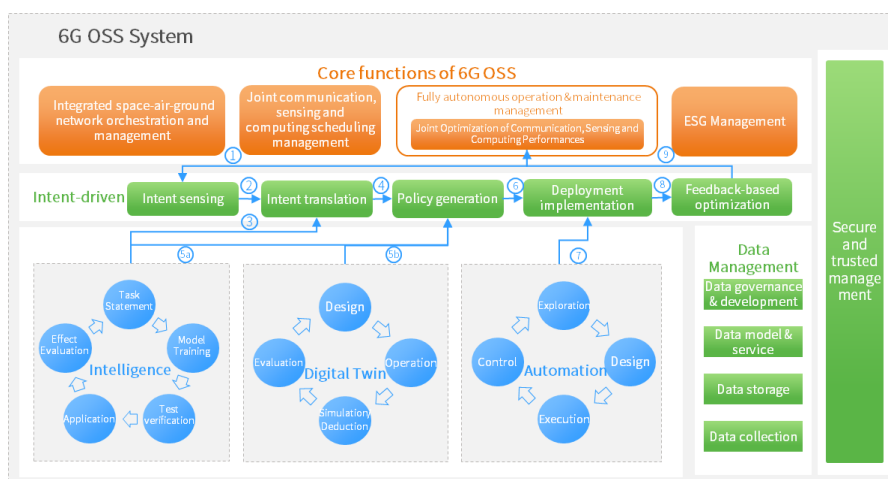


Figure 6-6 Joint Optimization of Communication, Sensing and Computing Performances

As shown in *Figure 6-6*, in 6G OSS, the joint optimization process of communication & computing resources required for the industrial vision inspection service is as follows:

Requirement generation: According to the industrial vision inspection service, the module for joint optimization of communication, sensing and computing performances in the fully autonomous operations management function of OSS will generate the requirements for communication & sensing & computing joint optimization and send them to the intent control function;

Intent sensing: The intent sensing module in the intent control function analyzes and outputs specific service-aware SLA requirements by calling the natural language processing model, semantic analysis model and other models in the intelligence capability, and sends them to the intent translation module;

Intent translation: The intent translation module calls the service communication, sensing and computing performance mapping model and the network load forecasting model in the intelligence capability to refine the business SLA requirements into the service transmission & computing models and base station resource consumption trend;

Intent sending: The intent translation module refines the business SLA requirements into a business transmission calculation model and a base station resource consumption trend, and sends them to the policy generation module as input data for policy learning;

Policy learning: The policy generation module calls the digital twin capability to build the digital twin scenario of the network corresponding to the vision inspection service, and performs the optimization learning of the network configuration parameters that affect the communication, sensing and computing performance in the digital twin scenario through the network resource allocation reinforcement learning algorithm in the intelligence capability;

Policy generation: The policy generation module generates a communication, sensing and computing network parameter optimization policy based on the digital twin and intelligence-based policy learning results and sends it to the deployment and implementation module;

Deployment and implementation: The intent control function applies automation capability to realize the automated execution of the policy in the existing network, and sends the execution effect to the feedback module;

Feedback: The feedback module monitors the effect of policy deployment and implementation, and iteratively optimizes the policy based on the effect feedback;

Policy reporting: The intent control function feeds back the final optimized policy and optimization effect to the module for joint optimization of communication, sensing and computing performances in the fully autonomous operations management function.

Case 2 Service Provisioning of 6G Space-Air-Ground Integrated Network

For the purpose of supporting ubiquitous coverage and meeting the demands of users for high mobility, the space-air-ground integrated network is expected to become one of the important forms of 6G networks in the future. 6G will bring users ubiquitous communication services with global coverage and Internet of Everything by covering three-dimensional network nodes such as ground base stations, unmanned aerial vehicles and satellites. Unlike traditional terrestrial networks, these heterogeneous communication nodes constitute a three-dimensional cyberspace, but with great differences in service support capabilities and terminal mobility support capabilities. Therefore, how to converge these different communication networks in combination with services and finally realize complementary advantages to meet business requirements will be the focus of consideration for operators, and will also be an important scenario for the future 6G OSS. Possible services include traditional voice/data services, precise positioning, image recognition, geological survey, emergency relief and logistics.

In the future 6G space-air-ground integrated network, the user service will be carried by a three-dimensional network formed by traditional ground cellular communication system, high-altitude communication system, medium and low-orbit satellites and high-orbit satellites once it is initiated. User terminals can send and receive data by using multiple constellations simultaneously in the form of encrypted tunneled links. The

available rates of these constellations vary greatly, with different coverage areas and service time windows. SLA can be decomposed according to specific user service intents, where the situational awareness of ground-based and space-based networks is realized and a real-time and predicted resource view is formed through intelligence capability, the key performance indicators such as user service rate and latency (when different resources are carried) are simulated and deduced through digital twin capability to form a resource orchestration policy, and finally, with the help of automation capability, E2E network networking, together with service provisioning and management, is realized through integrated space-air-ground network orchestration and management.

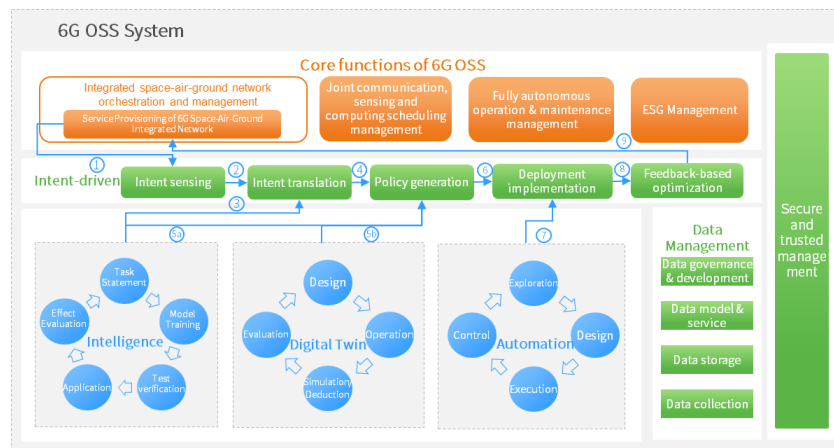


Figure 6-7 Service Provisioning Process of 6G Space-Air-Ground Integrated Network

As shown in *Figure 6-7*, in 6G OSS, the service provisioning process of 6G space-air-ground integrated network is as follows:

Requirement generation: The user initiates a service request including its SLA requirements;

Intent sensing: The intent sensing module in the intent control function analyzes and outputs specific service-aware SLA requirements by calling the natural language processing model, semantic analysis model and other models in the intelligence capability, and sends them to the intent translation module;

Intent translation: The intent translation module calls the space-air-ground integrated situational awareness capability in the intelligence capability to analyze and predict the

land, high altitude, medium-low orbit and high orbit satellite resources, and provides resource selection models;

Policy generation: The policy generation module calls the twin and intelligence capabilities to provide the resource allocation policy schemes and relevant QoS guarantee policies required by end users;

Deployment and implementation: The intent control function applies automation capability to realize the automated execution of the policy in the existing network, and sends the execution effect to the feedback module;

Feedback: The feedback module monitors the effect of policy deployment and implementation, and iteratively optimizes the policy based on the effect feedback;

Policy reporting: The intent control function feeds back the final resource orchestration policy and service status to the space-air-ground integrated network orchestration and management module and other related service guarantee & optimization modules.

VII. Realization of 6G OSS

This White Paper on the analysis of the key technologies and functional architecture of 6G OSS in Chapters IV and V. Nonetheless, the realization of 6G OSS is not accomplished at one stroke, but based on the existing network OSS, gradually evolved and realized in stages.

7.1 5G OSS

The main functions of 5G OSS can be abstracted into the followings: network service orchestration, network resource management, network fault management, network performance management, network experience analysis and network operations management.

Network service orchestration: It designs and orchestrates the E2E high-level process of service provisioning, coordinately schedules cross-domain sub-processes, and uniformly provides the provisioning interface to connect with the service operation system. It realizes the unified design, operation and full-process visualization management of the processes.

Network resource management: It manages the all-domain network resource data, resource access, resource scheduling and E2E network resource topology views for operators, and provides various resource services ^[46].

Network fault management: It realizes centralized network monitoring and realizes E2E service-aware monitoring and event-centered centralized monitoring. It is realized through fully-automatic service-based mode ^[47].

Network performance and management: It realizes E2E analysis on network and service quality, analytical application of various subjects, centralized monitoring and analysis of network performance, and especially for cross-domain services such as VoNR ^[48].

Network experience analysis: It realizes the quantitative analysis on quality experience of various key user services; the identification, appeasement and problem handling of bad experience users; and preventive O&M [49, 50].

Network O&M management: It realizes unified and centralized scheduling management of O&M, and provides services such as automatic order dispatching, involving applications such as work order management, network maintaining management, management of installation, as well as basic data management and statistical analysis functions supporting the above-mentioned applications.

Domain management unit related to OMC of various network devices: It realizes automatic operational maintenance and automatic configuration activation of intra-domain network devices.

As the concept of autonomous network continues to take hold, the network OSS, as the development engine of autonomous network, has also been continuously improved in terms of the automation and intelligence levels. As a result, some general and platform-based technologies or systems have emerged in the 5G OSS of mainstream operators, including network data platform and AI platform, of which, the main functions are as follows:

Network data platform: It is the basic capability of digital transformation and data driving, and is responsible for the unified acquisition and storage of all kinds of data in terms of network management. The network data platform accesses the network and service system data all over the networks and specialties of the operators, and on this basis, performs centralized management, centralized storage and unified modeling of data. At the same time, it provides multiple generated data access services such as data synchronization, data services and tenant settlement towards various service systems and applications of operators, supports the sharing of batch data and real-time data, which can meet the data usage requirements of different systems of operators and provide basic data guarantee for the full life cycle automation networks of operators.

Network AI platform: With the management activities undergoing continuous automation, the demand for network AI capability becomes increasingly obvious. As an external AI infrastructure for large-scale intelligent services, network AI platform provides systematic and engineered AI technical capability to the whole OSS. It can collect data information from various NEs or network systems alone or in cooperation with functional entities such as NWDAF and SON, and carry out real-time and offline inferring based on various field models of autonomous networks, so as to enable intelligent applications of various networks with AI [51, 52].

7.2 Evolution Route Towards 6G OSS

6G OSS is a natively secure and intelligent network management system that provides space-air-ground and communication-sensing-computing integrated operations management for 6G networks, empowers the global automation, intelligence and twin capabilities of networks, and provides ESG services to the society. The evolution route with regard to implementation of 6G OSS can be divided into the following phases: intelligent interconnection, cooperative empowerment, and integration, as shown in *Figure 7-1*.

Phase I connection-aimed 6G OSS

In the first phase, 6G OSS will be able to manage the 6G space-air-ground integrated network and the operation of the new communication, sensing and computing integrated services. At the same time, it will also be connected with the existing networks such as 4/5G. 6G OSS will collect and parse the data of different standard networks for 6G network O&M. Through the interconnection and interaction among systems, 6G OSS perform will conjoint analysis on multi-mode network data to further enhance the value of OSS. At the same time, 6G OSS mainly provides cooperative scheduling and management of communication, sensing and computing resources for 6G networks, and realizes the interconnected application of three core capabilities (automation, intelligence and digital twin) and various functions of 6G OSS.

Phase II Cooperation-aimed 6G OSS

In the second phase, 6G OSS will realize cooperative O&M among different subdomains of the 6G space-air-ground integrated network and the existing standard networks, and the cooperative optimization among communication, sensing and computing services. The automation, intelligence and digital twin capabilities of 6G OSS will be deeply integrated with the O&M systems of the existing network, which will greatly improve the autonomous level of the existing network.

Phase III Collaboration-aimed 6G OSS

In the third phase, for new services such as scheduling and management of deeply joint communication, sensing and computing resources, service selection and provisioning of space-air-ground integrated network, 6G OSS will comprehensively schedule and control the resources of 6G networks and existing standard networks based on the enhanced intent-driven capabilities, and performs the global service orchestration and network O&M of the converged architecture of the 6G space-air-ground integrated network and the existing networks. At the same time, it will realize the integrated application of three core capabilities (intent-driven automation, intelligence, and digital twin).

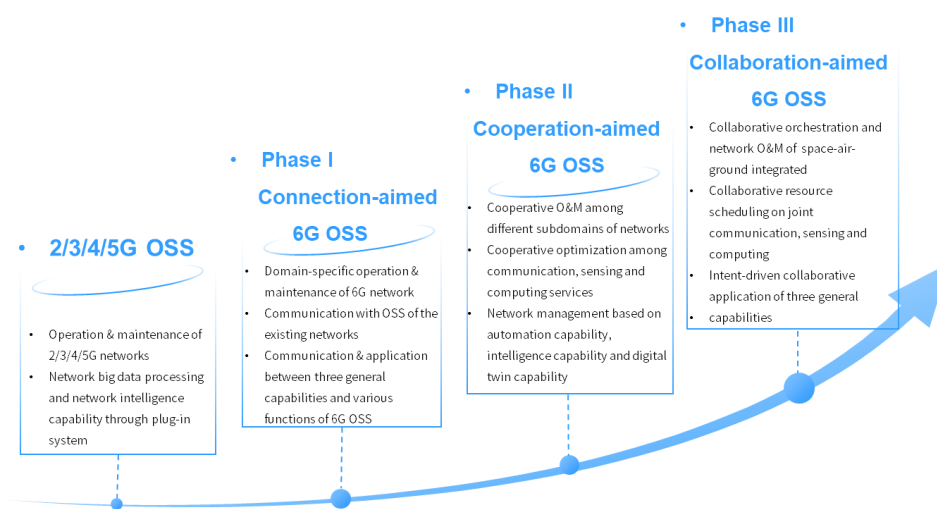


Figure 7-1 Evolution of 6G OSS implementation

7.3 Direction of 6G OSS Standards Evolution

With the intergenerational evolution of communication networks, network services are increasingly complex. To improve the efficiency of network O&M and management, different evolution focuses are given to the standardization priorities for the network management architecture related with OSS in different periods.

3G: Service Support-oriented Network Management Architecture

The network management of 3G systems is mainly oriented to network service support. The TMN framework was introduced by the International Telecommunication Union (ITU) in the late 1980s. ITU-T M.3010 puts forward the logical layered architecture (LLA) of TMN: network element layer (NEL), element management layer (EML), network management layer (NML), service management layer (SML) and business management layer (BML). ITU-T M.3400 specifies the following TMN management functional areas: fault management, configuration management, accounting management, performance management, security management (FCAPS). Up to now, TMN is widely used in many areas, involving telecommunication network and telecommunication service management: from service prediction to network planning; from telecommunication engineering, system installation to O&M and network organization; from service control and quality assurance to business management of telecom enterprises.

In the mid-1990s, TMF proposed the Telecom Operations Map (TOM), a service process model for telecom industry. To expand TOM for enterprise management and support for the new services generated by the Internet and e-commerce, TMF proposed the enhanced TOM (eTOM) in 2001 to improve TOM. The process management area in eTOM focuses on provisioning, assurance and billing & revenue management, which are also referred to as “FAB” for short. The eTOM provides a foundational framework for the whole industry and has become the de facto industry standard and common language.

4G: Virtualization Support-oriented Network Management Architecture

Network management in 4G era focuses on support for network virtualization. To accelerate the deployment of new network services, network service providers and telecom operators are aggressively embracing the network function virtualization (NFV), which can gradually discard heavy and expensive private network devices. In October 2012, 13 operators set up the industry specification group of European Telecommunications Standards Institute (ETSI) committed to promoting network function virtualization (ETSI ISG NFV), which is responsible for developing and formulating the virtualization architecture of telecommunication networks, such as NFV MANO.

In 2014, ETSI took the lead in launching the Mobile Edge Computing (MEC) standard project. This project team aims to build a service platform of cloud computing and IT environment for application developers and content providers at the mobile network edge, and open up the information about radio access network via this platform to achieve high-bandwidth low-latency service support and local management. In 2016, ETSI expanded the access mode of MEC from cellular network to WLAN and other access modes, that is, expanded the concept of Mobile Edge Computing into a new Multi-access Edge Computing (MEC).

5G: Intelligence Enhancement-oriented Network Management Architecture

With the development of AI technology, 5G network management is mainly oriented to the network intelligence enhancement. At the beginning of the formulation of 5G standard, 3GPP considered applying AI and big data analysis technologies to 5G networks. At the beginning of 2017, Network Data Analytics Function (NWDAF) was introduced for the first time in R15 as AI + big data engine of 5G networks. In 2018, “Intent-driven management service for mobile networks” was launched, and the concept, automation mechanism and application scenarios as well as intent description mechanism of intent-driven management service for mobile networks were specified in TR 28.812. In 2020, the “Autonomous Network Levels (ANL)” standard project was established. In addition, 3GPP also defines the Management Data Analytics Service

(MDAS) in TS28.533, which provides data analytics of different network related parameters including for example load level and/or resource utilization.

In 2017, ETSI established the Experiential Networked Intelligence Industry Specification Group (ENI ISG), the first network intelligence specification group in the industry. It proposed to use AI and context-aware policy to improve the performance of 5G networks through provision, operation and guarantee of automated services based on user needs, environmental conditions and business objectives. In December 2017, the Zero Touch Network & Service Management (ISG ZSM) Working Group was established, which focused on wireless and core networks. Its standardization goal was to automate the management of E2E networks and services (such as delivery, deployment, configuration, maintenance and optimization).

In 2019, TM Forum initiated an initiative and set up the Autonomous Networks Project, which aims to define fully automated zero wait, zero touch, zero trouble network to support self-configuration, self-healing, self-optimizing and self-evolving telecom network infrastructures for telecom internal users, explore and provide industry-leading E2E network automation methodology.

5G Advanced: Cloud-native Servitization-oriented Network Management Architecture

With the continuous development and maturity of cloud-related technologies, 5G core networks have evolved from SDN/NFV to cloud native networks for the purpose of supporting the rapid launch and on-demand deployment of services. Oriented towards 5G-Advanced, network servitization is evolving to cover the whole network from core networks. 3GPP has completed the standard development of service-based architecture (SBA) and service-based management service (MnS) for 5G core network. In the future, the efficiency of network management can be improved through continuous optimization and decoupling and open service.

With the deepening digital transformation in all industries, facing the new era of future network driven by digital intelligence and featured by ubiquitous connectivity and false or true complement, TM Forum launched the Open Digital Architecture (ODA) in 2020,

which helps operators build digital IT systems supporting automated O&M like building blocks by providing standardized cloud native software components. This helps service providers and their suppliers to accept the way of cooperative development and agile working across organizations.

6G: A New Network Management Architecture for Joint Communication, Sensing and Computing and Space-Air-Ground Integration

Based on the analysis on the evolution of the above network management-related architectures, taking the new 6G communication-sensing-computation and space-air-ground integrated network architecture into consideration, the past evolution approach of patching one-dimensional capability enhancement or add-on should be shifted to reconstruction of the OSS full-stack architecture of the whole network management system.

As shown in *Figure 7-2*, functions as integrated space-air-ground network orchestration and integrated management, communication, sensing and computing scheduling management and ESG management need to be further added to the core network management functions of 6G OSS on the basis of the original traditional network service support. The E2E service quality and resource optimization of the network are fully guaranteed through the introduction of management services such as data management and intent management. In addition to realizing automation and intelligence of network management, network simulation deduction through digital twinning technology is required to provide intuitive and accurate twin support for network management decision-making. Furthermore, 6G OSS will provide security and trust management and ESG support from the perspective of native network, comprehensively ensuring the sustainable development of 6G OSS.

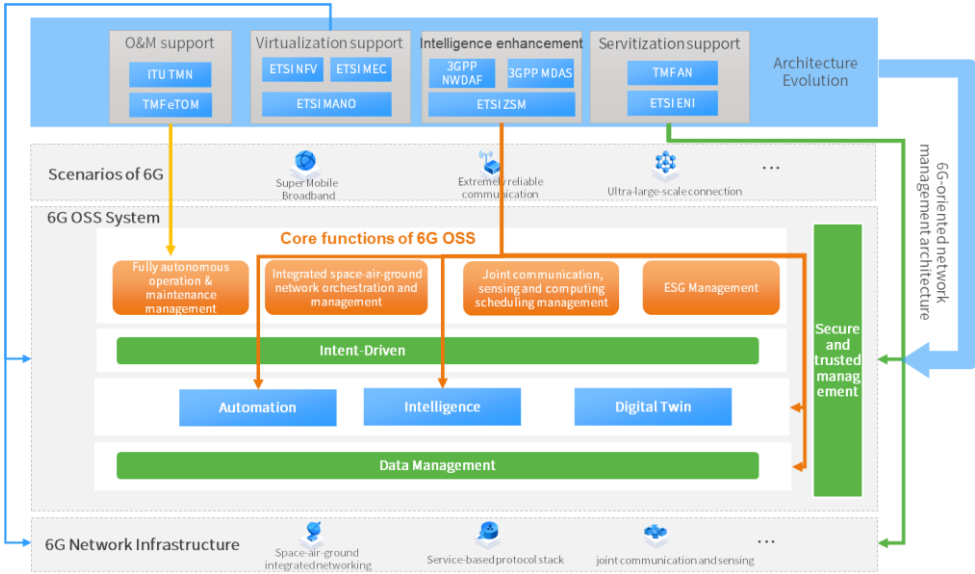


Figure 7-2 Evolution from Existing Network Management Architecture to 6G OSS

VIII. Summary and Prospect

As one of the world's first forward-looking and systematic white papers on 6G OSS, this White Paper starts with the global 6G development status, and comprehensively analyzes the typical scenarios and potential key technologies of 6G networks as well as new architecture evolution requirements for OSS. It puts forward the overall vision for 6G OSS by combining 6G visions and the development of OSS, studies 12 potential key technologies of 6G OSS, proposes the 6G OSS functional architecture which comprises core function, three management functions and three general capabilities, and discusses the evolution route towards 6G OSS.

At present, studies on 6G system architecture and key technologies is still in the preliminary stage, and researches on 6G OSS has just started. The 6G infrastructure and its commercialization is still a medium-and long-term goal. However, pilot technology research and prototype system development targeting the three core capabilities of 6G OSS can be carried out relying on the existing infrastructure such as 5G intelligent networks, computing-aware network and 5G private networks. At the same time, the development of digital twin and other technologies also help to accelerate the innovation of 6G networks, reduce the industrial R&D cost and shorten the R&D cycle. These are the basic conditions and driving force for 6G OSS to take the lead in supporting the goal of 6G network commercialization in 2030.

Based on the five visions of 6G OSS, a roadmap has been developed as below:

In 2025, the evolution towards connection-aimed 6G OSS will be completed. At this phase, 6G OSS will support domain-specific O&M oriented to 6G space-air-ground integrated architecture and be connected with existing 4/5G networks. It will possess the management function for 6G new wireless technology and the communication and computing service orchestration management function based on the native computing-aware network. In addition, it will initially be provided with digital twin, native AI and automation capabilities which are communicative with all functions of 6G OSS;

In 2027, the evolution towards cooperation-aimed 6G OSS will be completed, “expanding from intelligent network management to automated, intelligent and digital-twin network management” and “building a secure and trustworthy 6G OSS” will be achieved, and the vision goals of “evolving from L5 5G autonomous networks to 6G OSS ready” and “incorporating environmental, social, and corporate governance (ESG) into 6G OSS capability system” will be initially realized. At this phase, 6G OSS will be provided with the cooperative O&M function among different subdomains of the 6G space-air-ground integrated network and the existing standard networks, and the cooperative optimization function among communication, sensing and computing services. In addition, 6G OSS will achieve digital twin /native AI /automation capabilities and cooperative O&M with the existing network management systems.

In 2030, the evolution towards collaboration-aimed 6G OSS will be completed, and the five vision goals of 6G OSS, such as “evolution from monolithic/single-domain network management to space-air-ground and communication-sensing-computing integrated management” and “evolution from L5 5G autonomous networks to 6G OSS ready”, will be fully realized. At this phase, 6G OSS will possess 12 key technical capabilities to achieve integrated resource scheduling and control of 6G and existing networks, as well as global service orchestration and network O&M of the converged architecture of the 6G space-air-ground integrated network and the existing networks. At the same time, it will realize intent-driven application of native automation, intelligence, and digital twin capabilities .

Bibliography

- [1] IMT-2030 (6G) Promotion Group, “White Paper on 6G Vision and Candidate Technologies”, 2021.6
- [2] Ouyang Y, ZHANG Y, GAO T, et al. The next decade of telecommunications artificial intelligence [J]. Telecommunication Science, 2021
- [3] NEXT G ALLIANCE, “Roadmap to 6G”, 2022.2
- [4] NGMN, “6G Drivers and Vision”, 2021.4
- [5] Ericsson, “6G – Connecting a cyber-physical world”, 2022
- [6] Huawei, “6G: The Next Horizon”, 2022
- [7] Samsung Research, “6G The Next Hyper Connected Experience for All”, 2020
- [8] Nokia, “Technology innovations for 6G system architecture”, 2022
- [9] University of OULU, “Key drivers and research challenges for 6G ubiquitous wireless Intelligence” White paper 6G Flagship research program, 2019
- [10] University of SURREY, “6G wireless an new strategic vision”, 2020
- [11] X.H. You, et al., “Towards 6G Wireless Communication Networks: Vision, Enabling Technologies, and New Paradigm Shifts”, 2020.8
- [12] IMT-2030 (6G) Promotion Group, “White Paper on 6G Typical Scenarios and Key Capabilities”, 2022.7
- [13] ITU-R M. IMT. Report “Future Technologies Trends Towards 2030 and Beyond”, 2022.7
- [14] IMT-2030 (6G) Promotion Group, “White Paper on 6G Network Architecture Vision and Key Technology Outlook”, 2021
- [15] CICT Mobile, “6G Scenario, Capability and Technology Engine White Paper”, 2021
- [16] China Mobile, “China Mobile 6G Network Architecture Technology White Paper”, 2022
- [17] University of OULU, “WHITE PAPER ON 6G NETWORKING” 2020.6
- [18] 6G ANA, “6G Network Native AI Technical Requirement White Paper”, 2022.1
- [19] Ericsson, “An intelligent platform: The use of O-RAN’s SMO as the enabler for openness and innovation in the RAN domain”, 2021.11
- [20] TM Forum, “A WHITEPAPER ON autonomous networks”, 2022.9
- [21] AsiaInfo Technologies, “White Paper on Computing Power Network”, 2022;
- [22] China Mobile Research Institute (CMRI), “A Digital Twin Network Approach for 6G Wireless Network Autonomy White Paper”, 2022
- [23] Purple Mountain Laboratories, “White Paper on Blockchain Enabled 6G Mobile Communications: Architecture and Technical Principles”, 2021.6
- [24] IMT-2030 (6G) Promotion Group, “Research on Intelligent Endogenous Architecture for 6G Network”, 2022
- [25] 5G PPP Architecture Working Group, “The 6G Architecture Landscape”, 2022.12
- [26] Hexa-X, “Initial 6G architectural components and enablers”, 2022.
- [27] Next G Alliance, “Next G Alliance report: 6G Technologies”, 2022
- [28] SK Telecom, NTT docomo, “6G Common Requirements”, 2023

- [29] Y. Ouyang, A. Yang, X. Ye, B. Cheng, M. Wu. Resource Scheduling Method for Computing Force Network: PCT/CN2022/095280[P]. PCT, May 26th, 2022.
- [30] Y. Ouyang, B. Cheng, M. Wu, A. Yang, X. Ye. Reinforcement Learning in Computing and Network Convergence Orchestration, arXiv:2209.10753, Sep. 22st, 2022.
- [31] AsiaInfo Technologies, “White Paper on Network with Endogenous Computing Force”, 2022
- [32] 3GPP SA-WG5, “Rel-18&Rel-19 time plan proposal for OAM”, 2022.1
- [33] Radio Management Institute of CCID Think Tank, “White Paper on Global Progress and Development Prospects of 6G”, 2021.4
- [34] ITU-T FG NET-2030 White Paper: “Network 2030-A Blueprint of Technology, Applications and Market Drivers Towards the Year 2030 and Beyond”, 2019.5
- [35] ITU-T FG NET-2030 Deliverable: “New Services and Capabilities for Network 2030: Description, Technical Gap and Performance Target Analysis”, 2019.10
- [36] ITU-T FG NET-2030 Technical Report: “Network 2030- Additional representative use cases and key network requirements for Network 2030”, 2020.6
- [37] ITU-T FG NET-2030 Technical Specification: “Network 2030 Architecture Framework”, 2020.6
- [38] TM Forum, “Autonomous Networks: Empowering Digital Transformation for Smart Societies and Industries”, 2020.10
- [39] ETSI, “Terms of Reference (ToR) for ETSI ISG Zero touch network and Service Management”, 2021.12
- [40] ETSI, “Terms of Reference (ToR) for ETSI ISG Network Functions Virtualization”, 2022.12
- [41] ETSI, “Terms of Reference (ToR) for ETSI ISG Experiential Networked Intelligence (ISG ENI), 2022.9
- [42] O-RAN, “Use Cases and Deployment Scenarios Towards Open and Smart RAN White Paper”, 2020.2
- [43] China Mobile, AsiaInfo Technologies, etc., “Digital Twin Network (DTN) White Paper”, 2021
- [44] D. Wang, T. Sun, X.W. Sun, J.C. Guo, J. Sun, G. Chen, A.D. Yang, Y. Ouyang, "Study On Digital Twins in Network Lifecycle Management" [J]. Telecommunications Science, 2022
- [45] S.L. Wang, J. Sun, P. Wang, A.D. Yang; Resource Scheduling Optimization in Cloud-Edge Collaboration [J]; Telecommunications Science, 2023, 39(2):163~p170
- [46] Y. Ouyang, T. Yan, "Profiling Wireless Resource Usage for Mobile Apps via Crowdsourcing-based Network Analytics" Internet of Things Journal, IEEE, vol.PP, no.99, 2015
- [47] Ye Ouyang, Alexis Huet, J. P. Shim, and Mantian (Mandy) Hu, “Latent Clustering Models for Outlier Identification in Telecom Data” Mobile Information Systems, vol. 2016, Article ID 1542540, 2016
- [48] Ouyang, Y.; Yan, T.; Wang, G., "CrowdMi: Scalable and Diagnosable Mobile Voice Quality Assessment Through Wireless Analytics," Internet of Things Journal, IEEE vol.PP, no.99, 2014
- [49] Y. Ouyang, Z. Li, L. Su, W. Lu and Z. Lin, "Application behaviors Driven Self-Organizing Network (SON) for 4G LTE networks" in IEEE Transactions on Network Science and Engineering, 2018
- [50] Ouyang, Y., Li, Z., Su, L., Lin, Z., Lu, W., “APP-SON: Application Characteristics Driven SON to Optimize 4/5G Network Performance and Quality of Experience” IEEE International Conference on Big Data, 2017

- [51] D. Zou, J. Ding, X. Wang, X. Ye, Y. Ouyang. “Research on network cloud equipment anomaly and root cause analysis” ITU Journal on Future and Evolving Technologies, Volume 3 (2022), Issue 2, Pages 89-97, 2022
- [52] J. Yin, W. Li, X. Wang, X. Ye, Y. Ouyang “4G/5G Cell-level multi-indicator forecasting based on dense-MLP” ITU Journal on Future and Evolving Technologies, Volume 3 (2022), Issue 2, Pages 108-116, 2022